

/ Absolute Maximum Ratings(Ta=25)


Maximum Average Forward Rectified Current @ Fig.1								
$\leq \leq$								
	θ							
	θ							
	θ							

× × ×

/ Electrical Characteristics(Ta=25)


				μ
				μ

/ Electrical Characteristic Curve

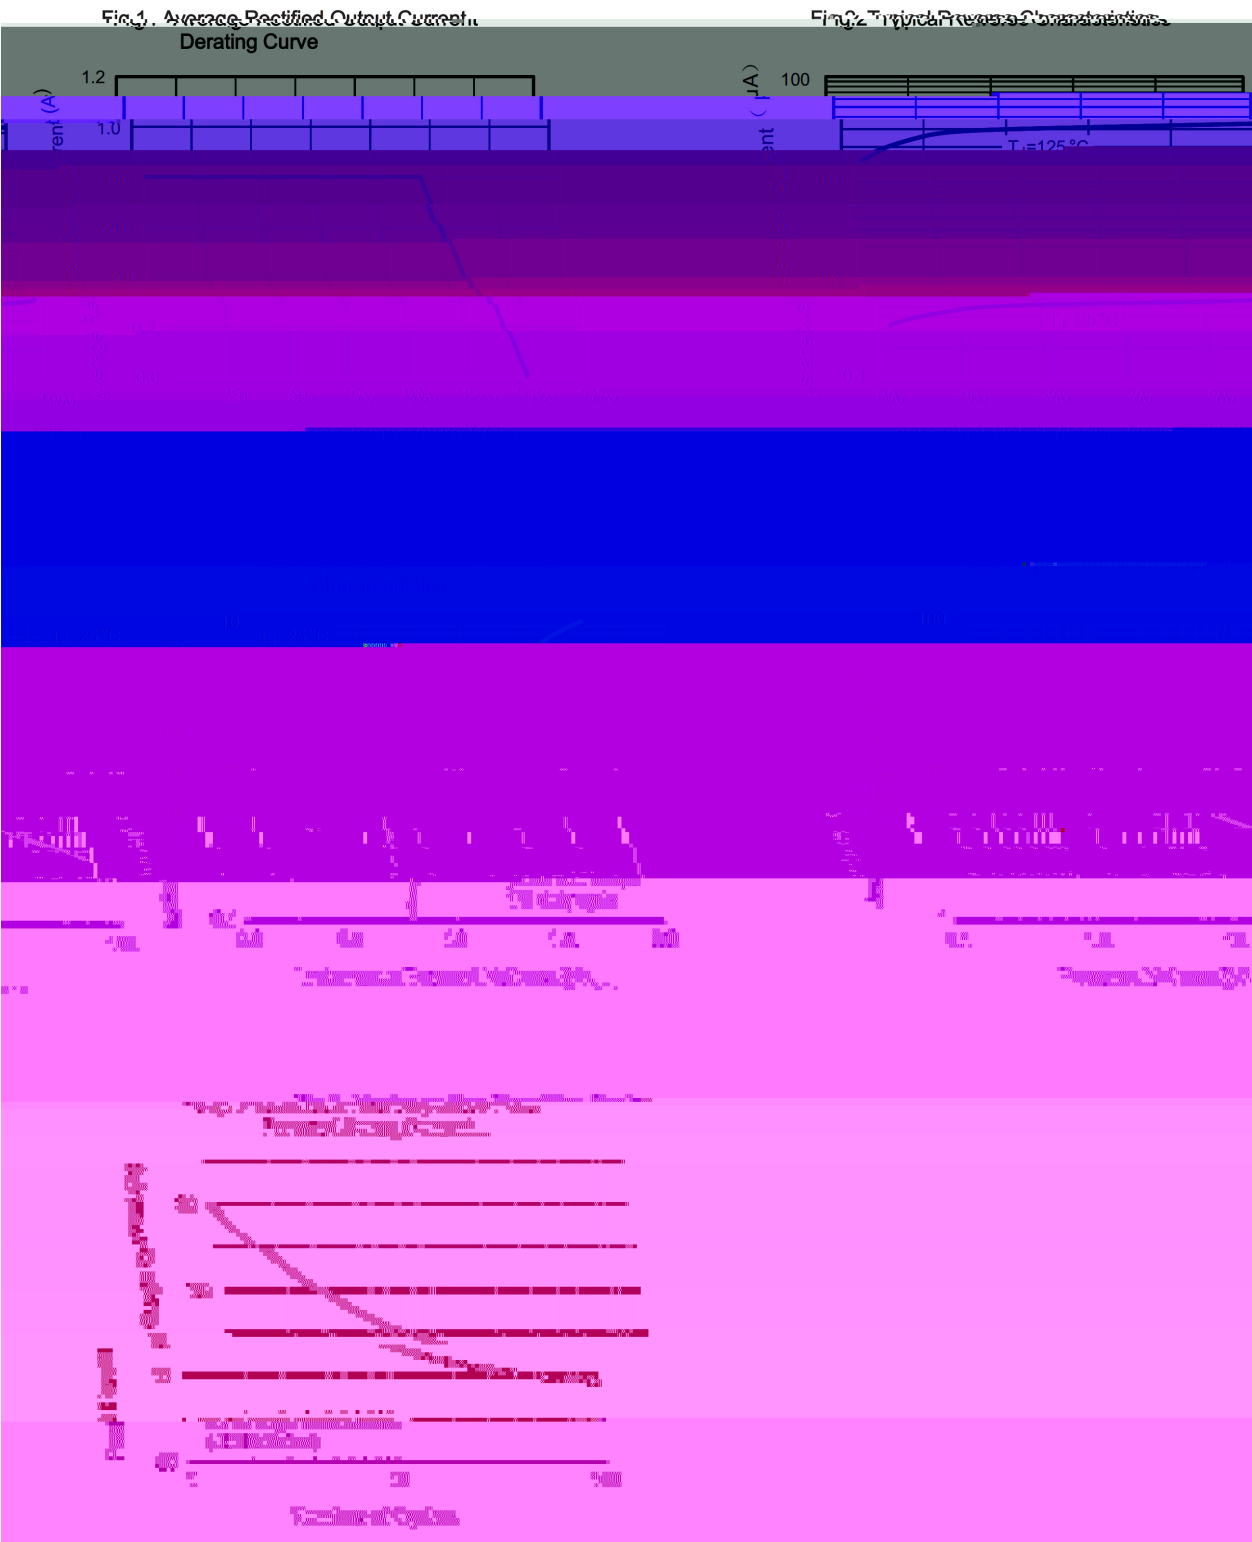


/ Package Dimensions

MBL

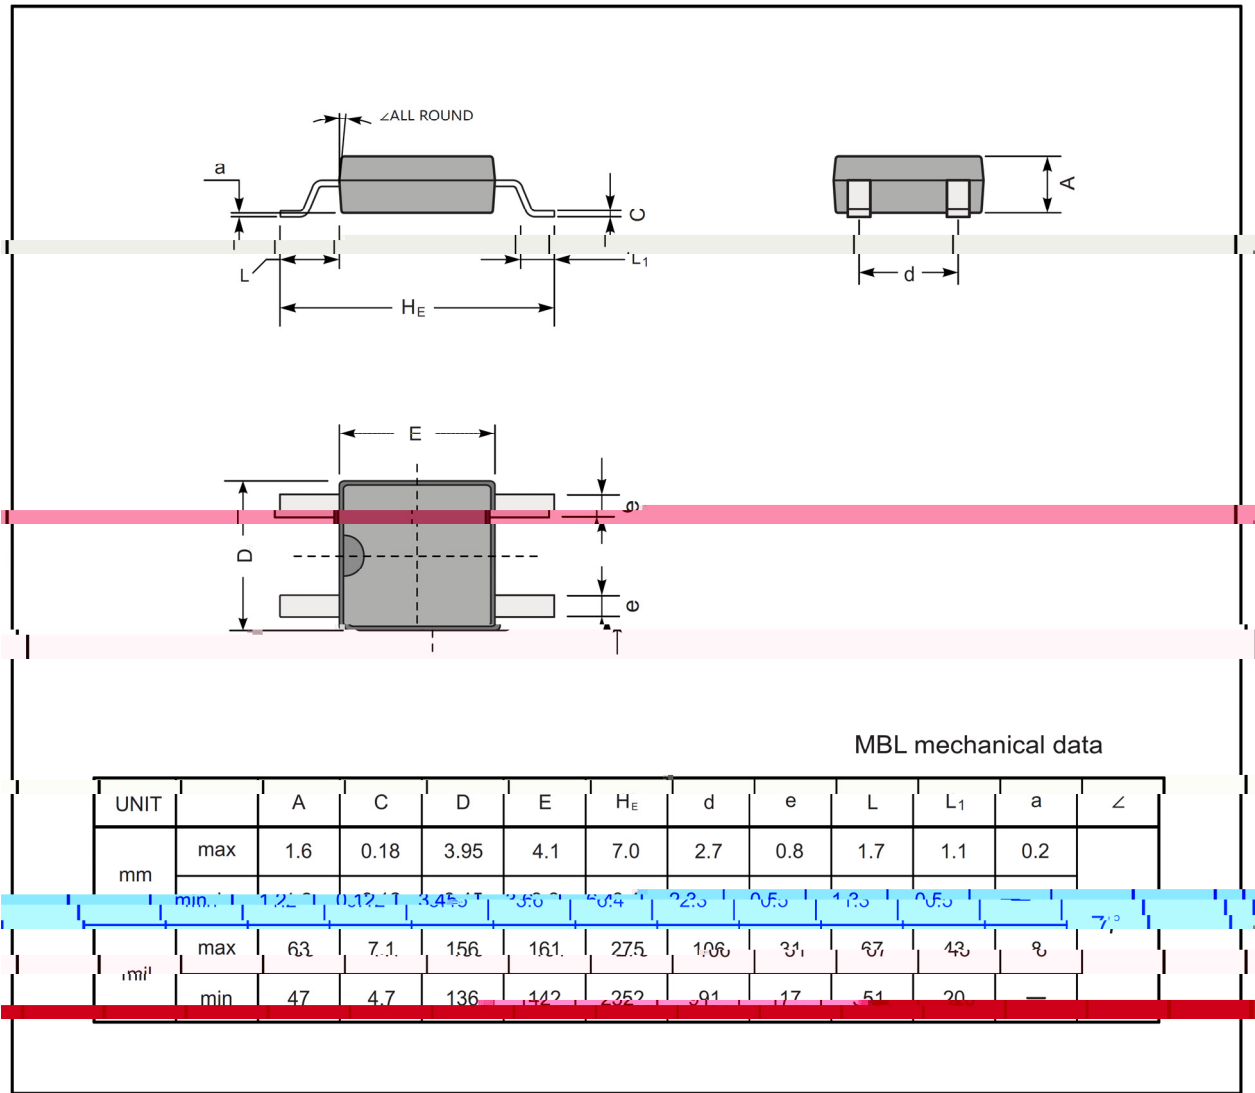



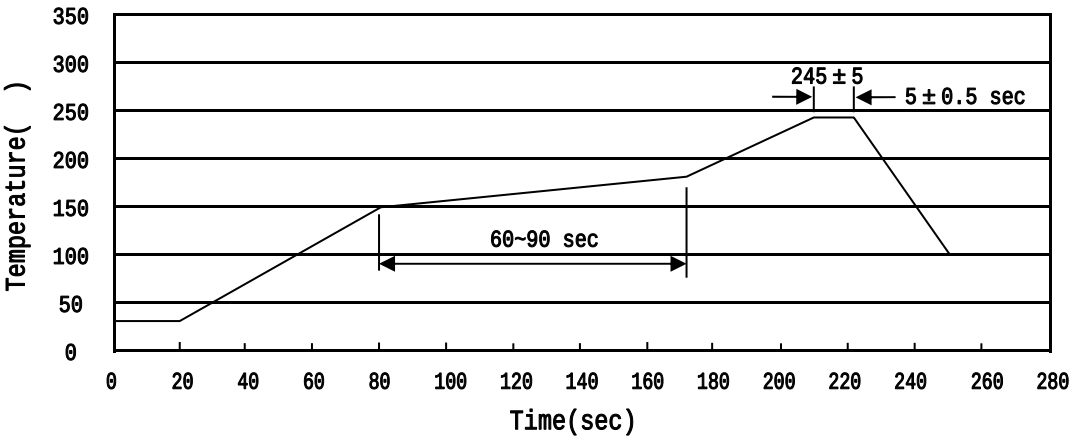

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices