


MJE172


/ Electrical Characteristic Curve

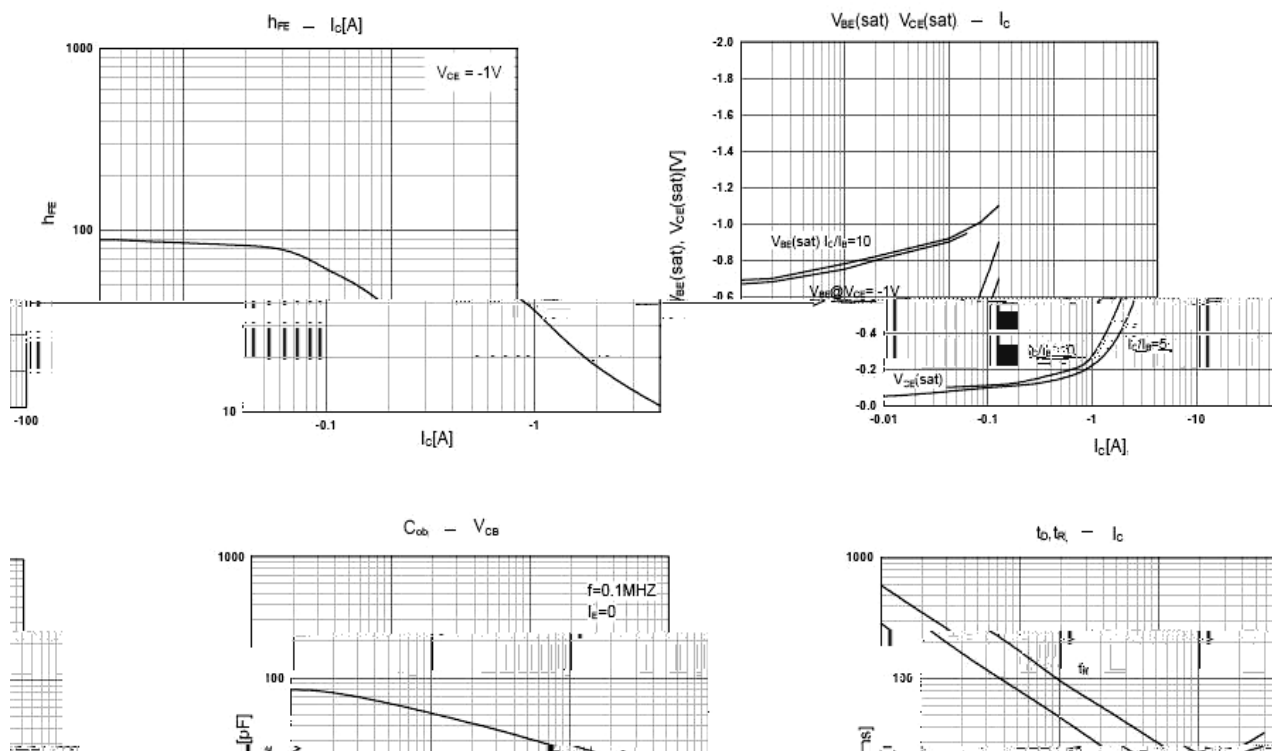

/ Package Dimensions

14-125T

单位: mm

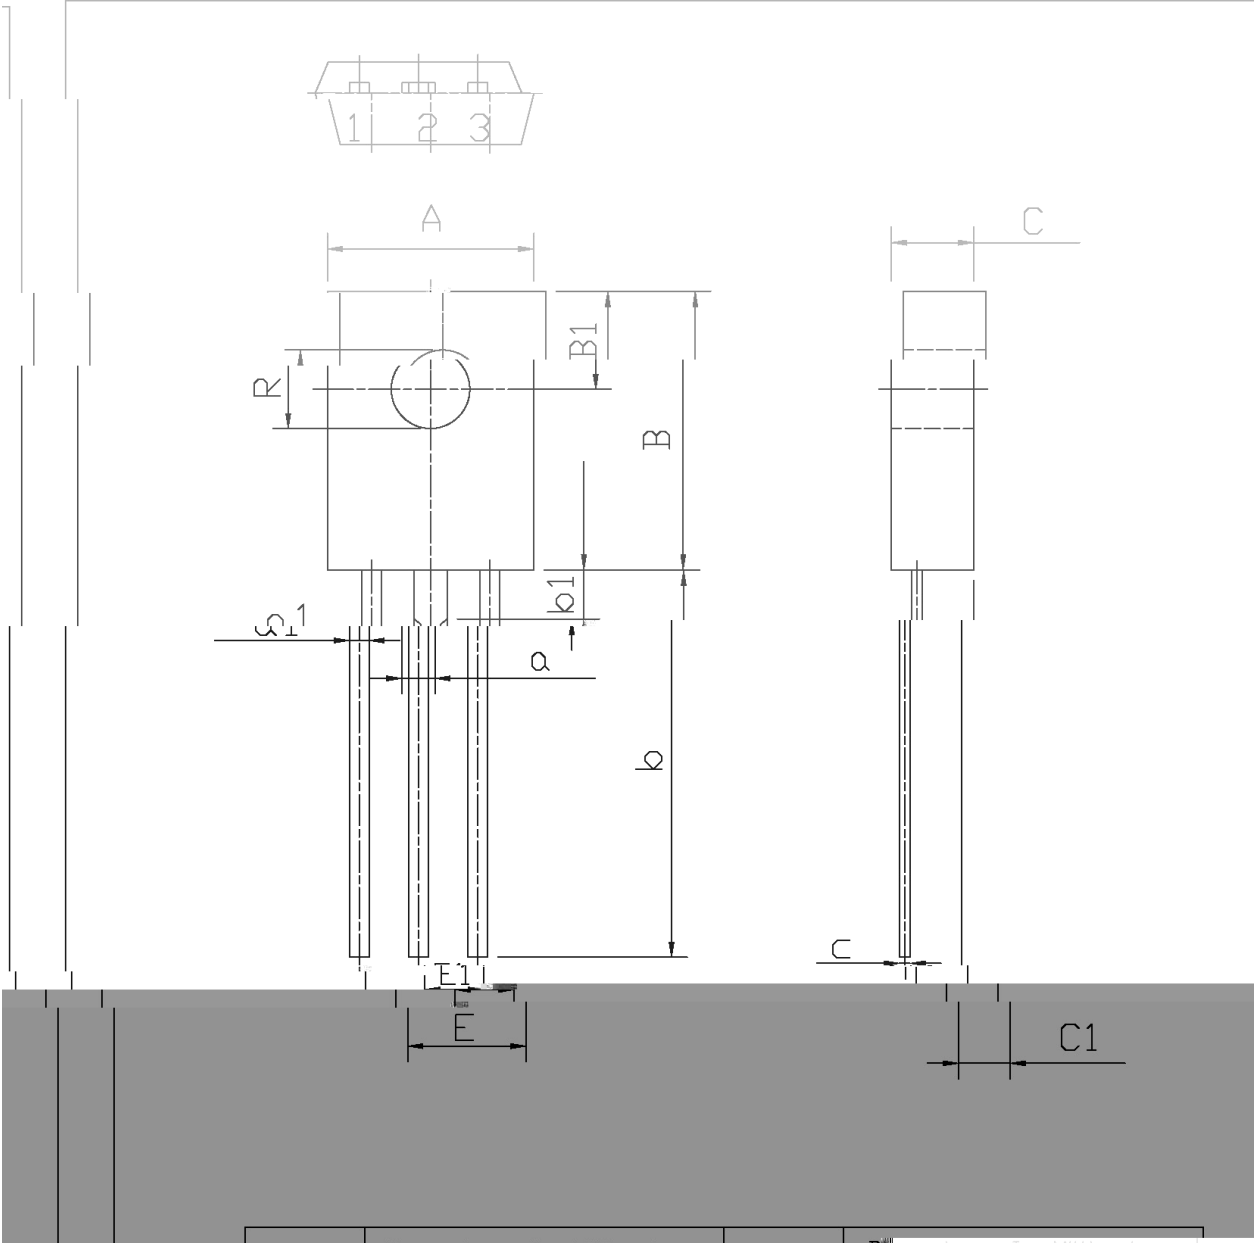

Dimensions in Millimeters (mm)			Dimensions in Millimeters (mm)		
Symbol	Min	Max	Symbol	Min	Max
A	7.8	8.2	a1	0.65	0.85
B	10.8	11.2	E	4.4	4.8
B1	3.8	4.2	C	3.1	3.3
R	2.95	3.15	C1	1.2	2.1
b	14	16	c	0.3	0.6
b1	1.9		a	1.27	
E1	2.1	2.5			

MJE172

Figure 1 is a line graph showing Temperature (°C) versus Time (sec). The temperature starts at approximately 25°C at 0 seconds, rises linearly to 115°C at 115 seconds, then rises sharply to a peak of 255 ± 5°C at 135 seconds. It remains at this peak for 5 ± 0.5 seconds before cooling down to approximately 105°C at 180 seconds. A horizontal dashed line indicates a temperature range of 86 ~ 100°C between 20 and 115 seconds.

 $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-126/F	500	6	3,000	5	15,000	135×190	237×172×102	560×245×195

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-126/F	65	26	1,690	5	8,450	532×31×5.6	555×164×50	575×290×180

6 6