


SOT-23
Silicon Diode in a SOT-23 Plastic Package.


Fast Switching, High Conductance. HF Product.

Small signal diode.

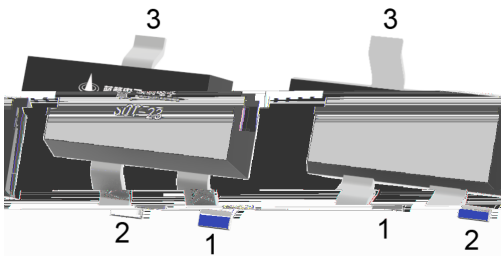


PIN: See Equivalent Circuit.


Type	MMBD4148	MMBD4148SE	MMBD4148CC	MMBD4148CA
Marking	H5H	HD4	HD5	HD6

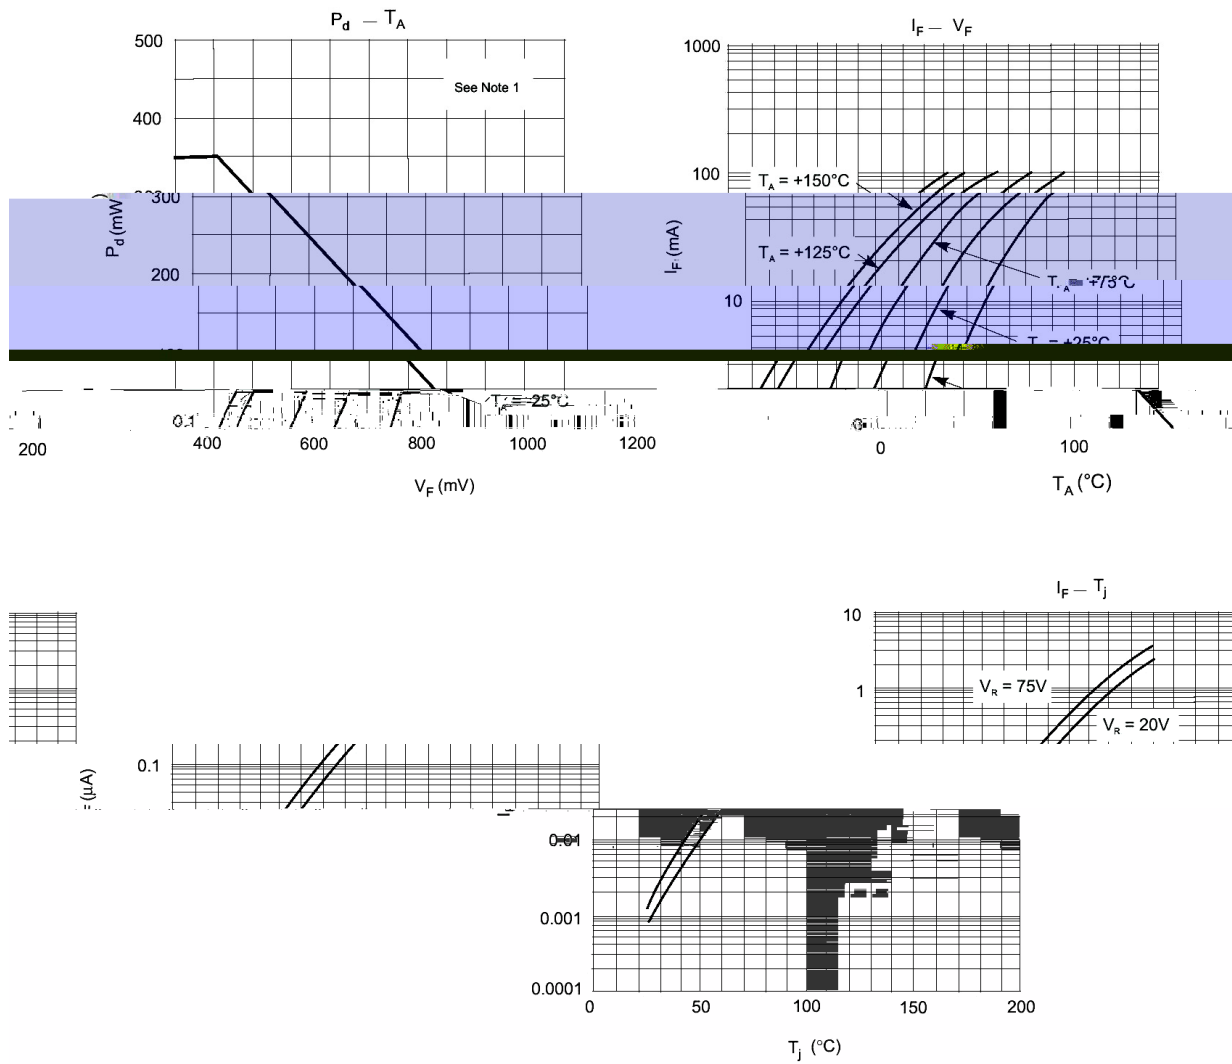


SOT-23

单位: 元

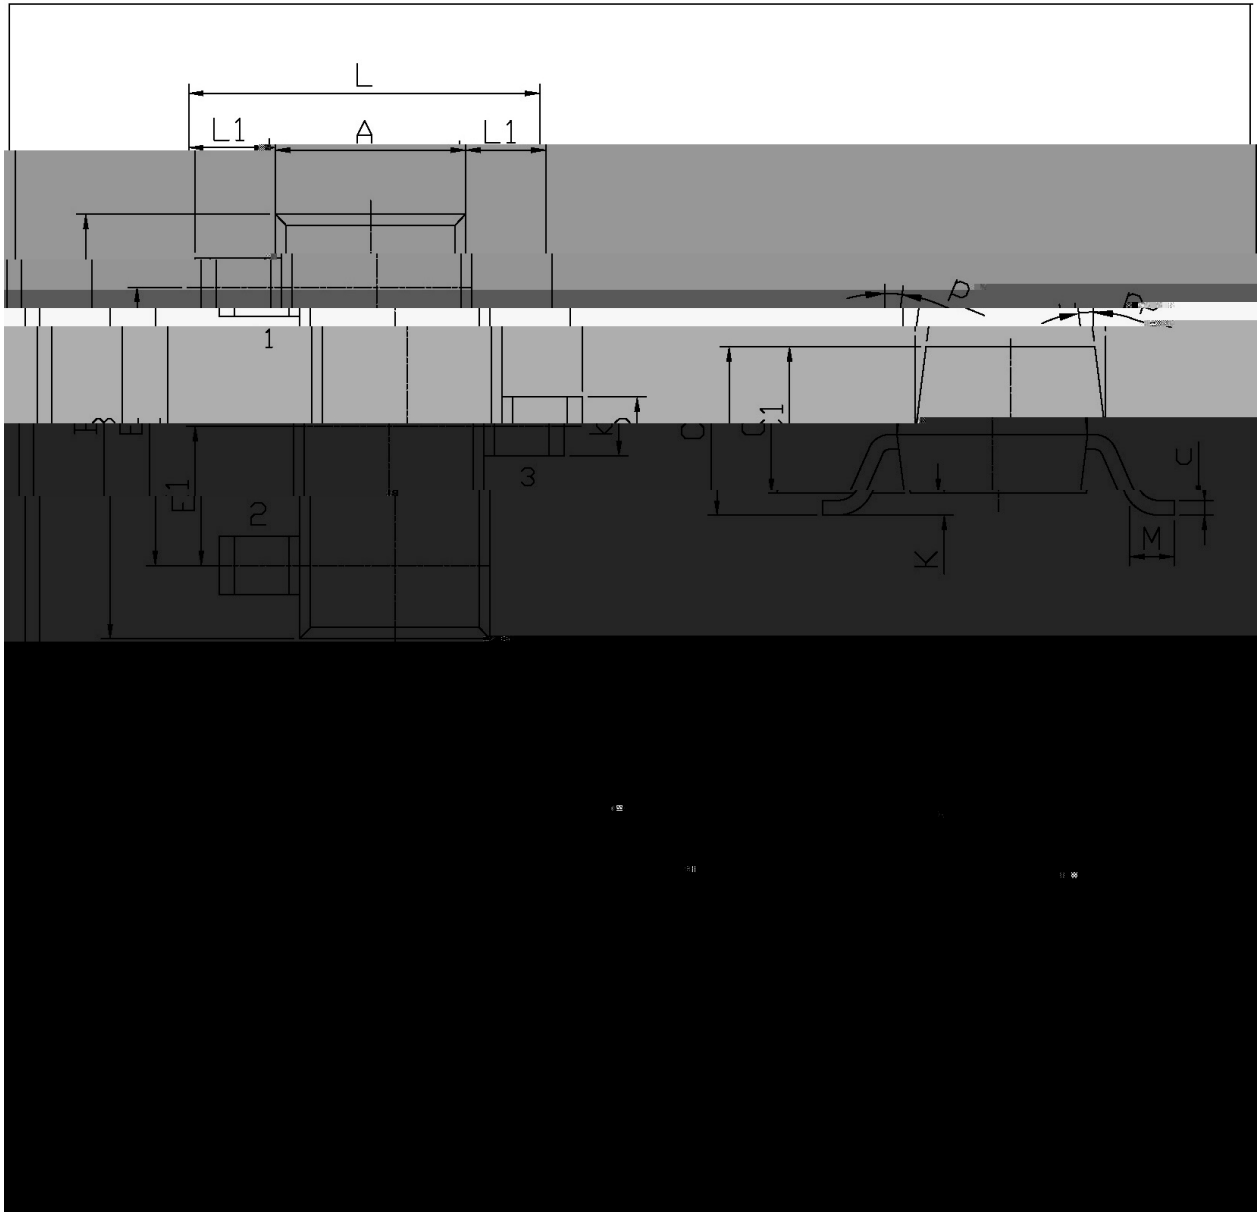

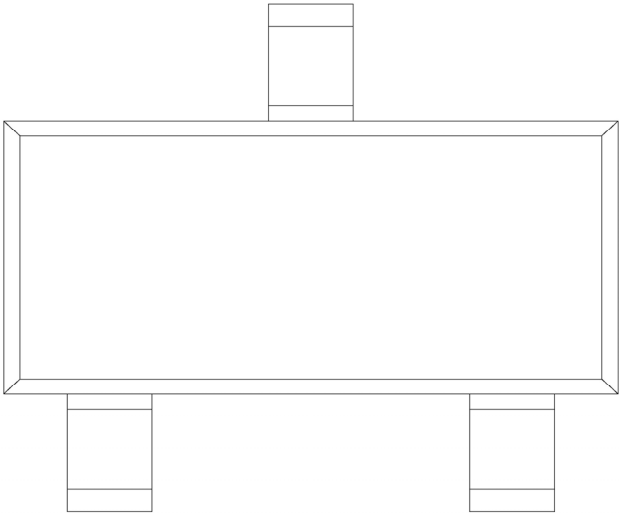

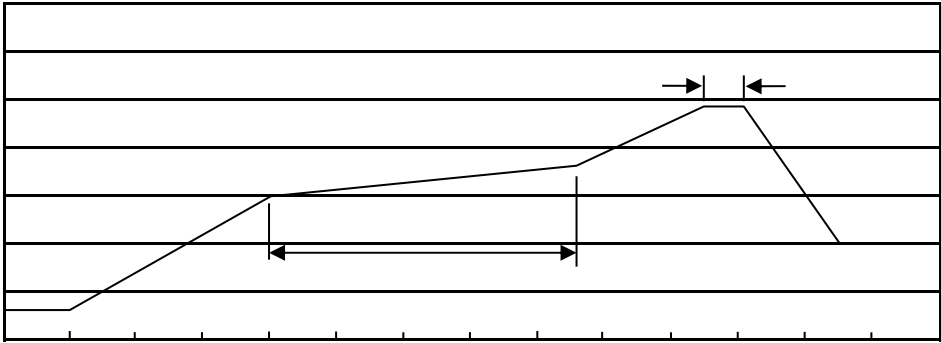

- 1

150 180

60 90sec;

2

245±5

5±0.5sec;

3

2 10 /sec.
- Note:

1.Preheating:150~180 , Time:60~90sec.

2.Peak Temp.:245±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205