

MMBT3906ZK

/ Descriptions


DFN1006-3L PNP
 DFN1006-3L

/ Features


h_{FE} $V_{CE(sat)}$

/ Applications

/ Equivalent Circuit



/ Pinning

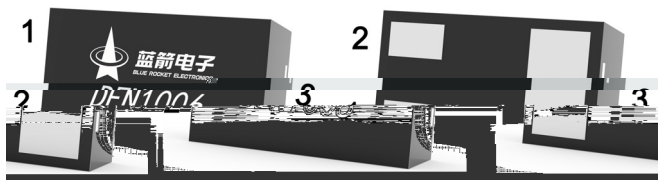

/ h_{FE} Classifications & Marking






/ Absolute Maximum Ratings(Ta=25)

			℃
			℃


/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						μ
						μ

/ Electrical Characteristic Curve

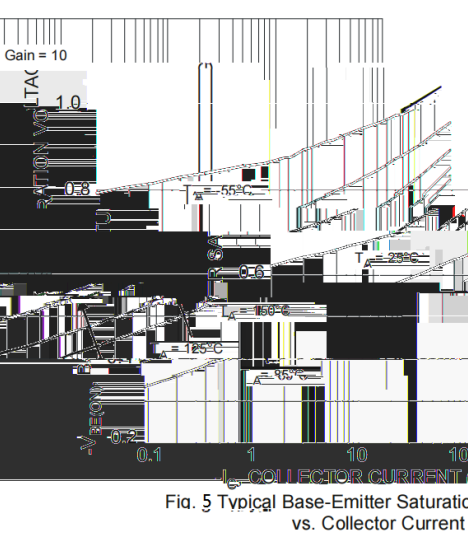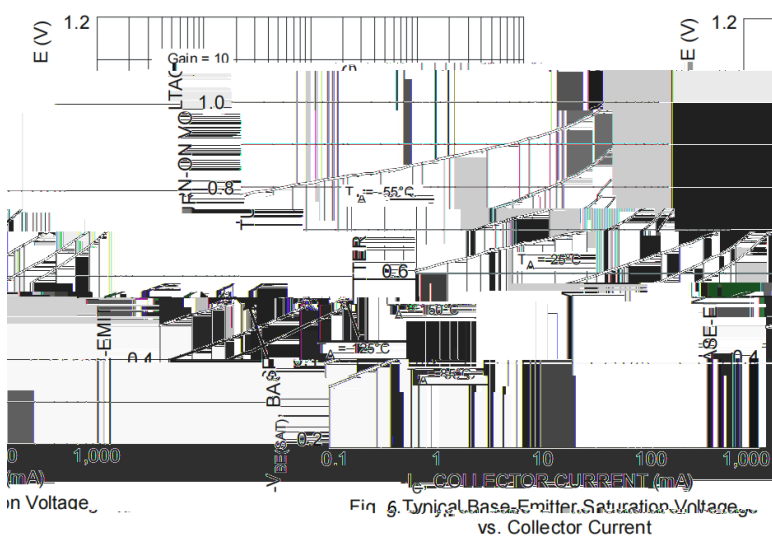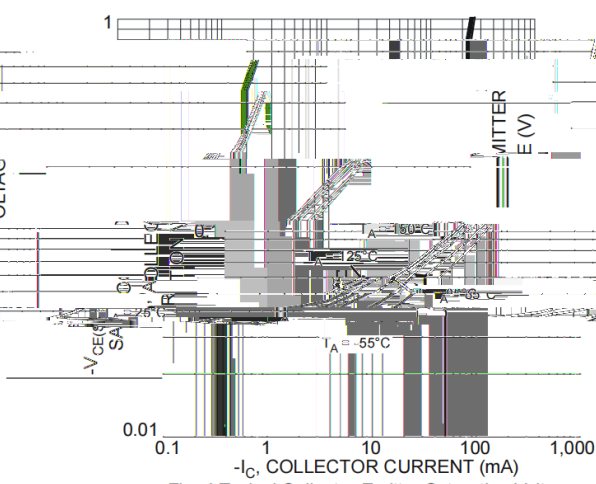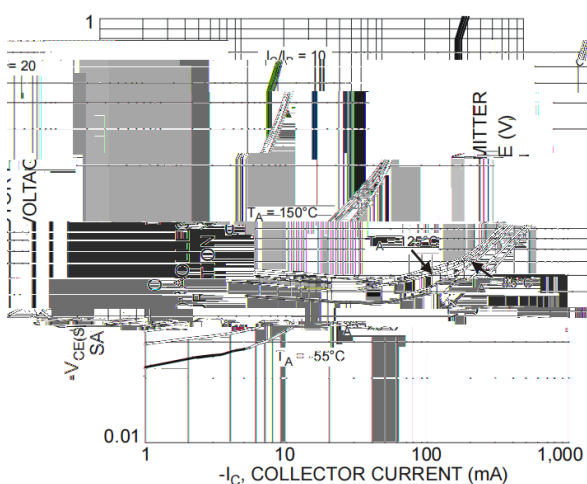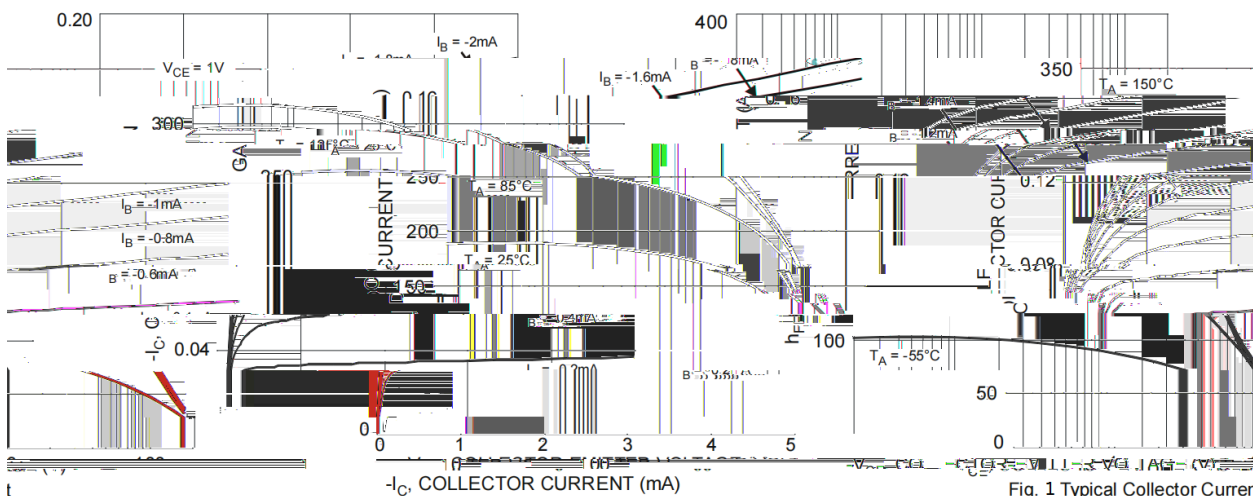


/ Package Dimensions

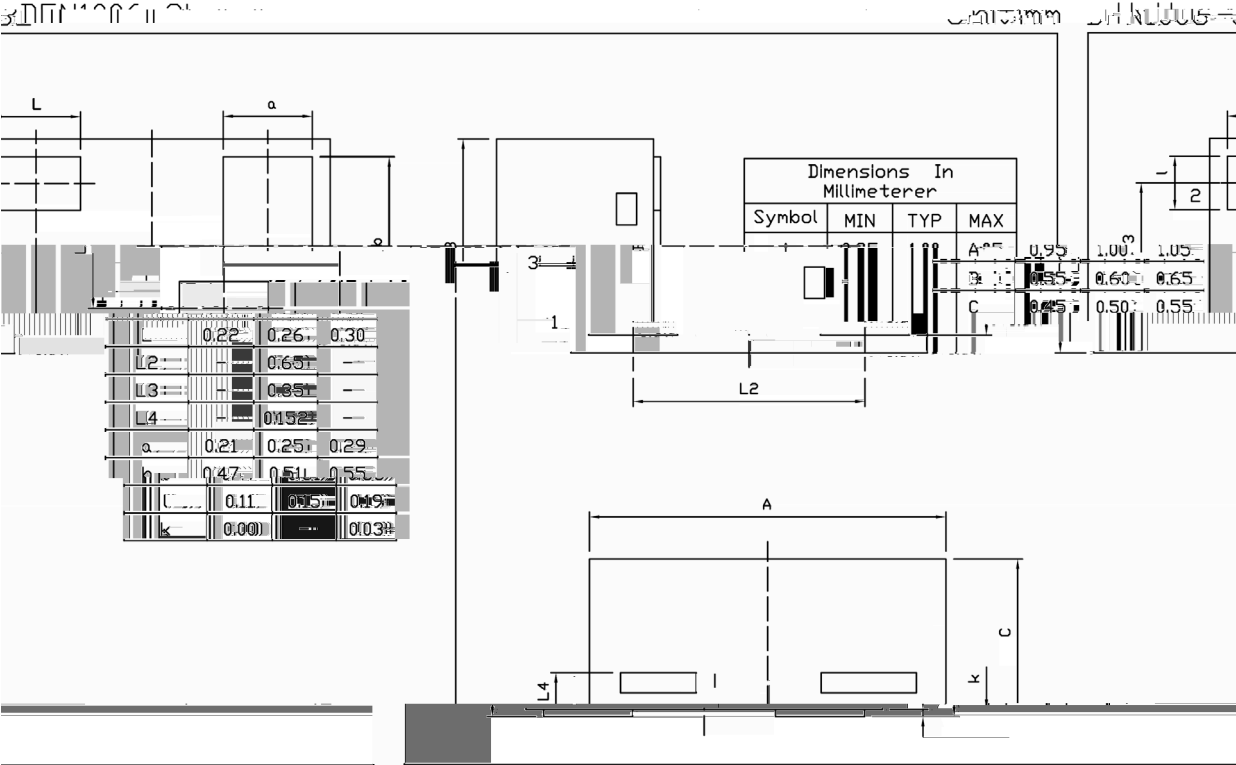

Rev.03 202108


/ Marking Instructions

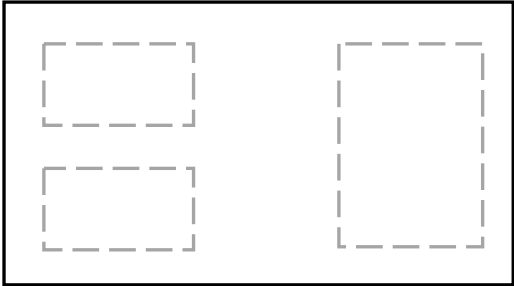

H

H

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

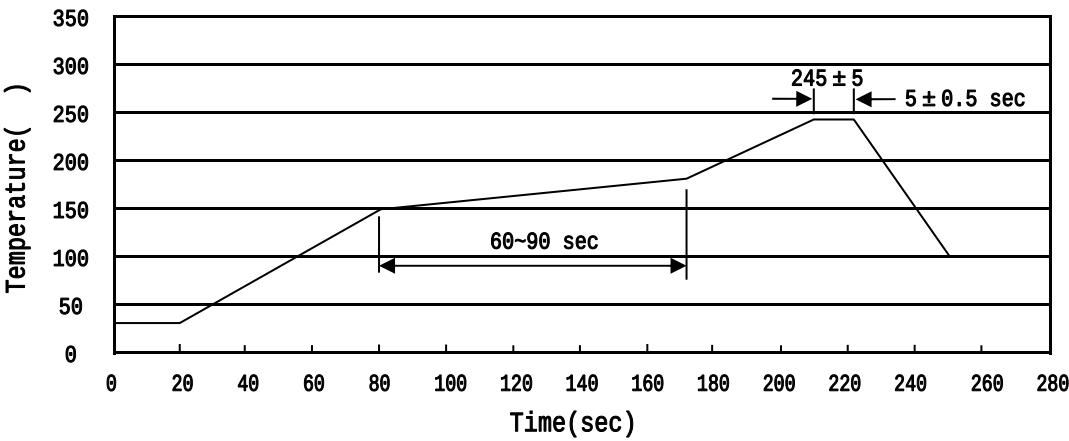

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices