

MMBT4401W



--	--	--

描述 / Descriptions

SOT-323 NPN

特征 / Features

ESD 4KV 400V

用途 / Applications I_C 500mA**内部等效电路 / Equivalent Circuit****引脚排列 / Pinning****印章代码 / Marking**

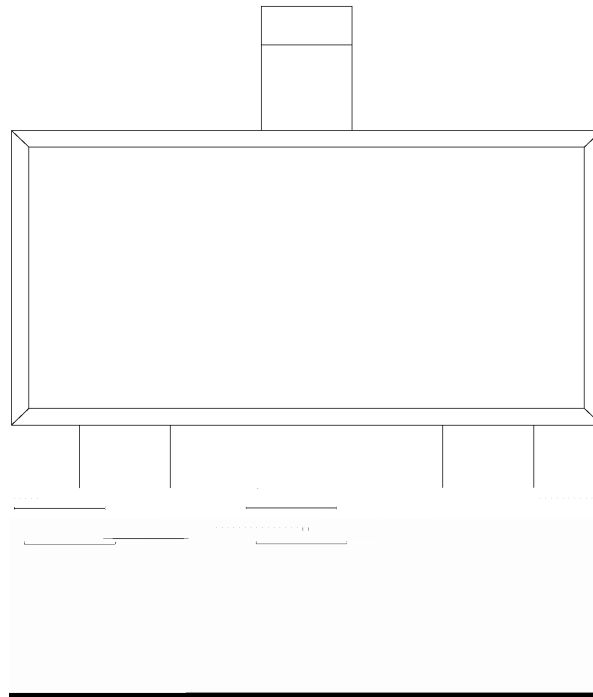
--	--

SOT-323

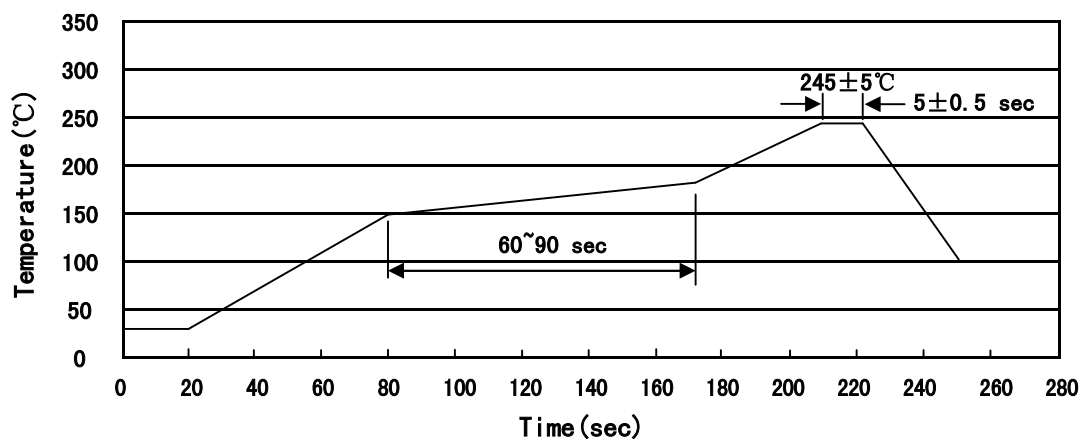
单位: 元



印章说明 / Marking Instructions



回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)


$$\begin{array}{ccccccc} & & & & ^\circ \text{C} & & \\ \pm & & \pm & & \pm & ^\circ \text{C} & \pm \\ & ^\circ \text{C} & & & & ^\circ \text{C} & \\ & & & & & & \end{array}$$

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

$$\pm \text{ }^{\circ}\text{C} \qquad \qquad \qquad \pm \qquad \qquad \qquad \text{ }^{\circ}\text{C}$$

包装规格 / Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

使用说明 / Notices