


MMBTA56

“Y / Descriptions

• Ě / Features

v / Applications

л ~ ђ ≈ / Equivalent Circuit




ã / ů / Pinning



Ł. Н Ё / Marking


Electrical Characteristic Curve

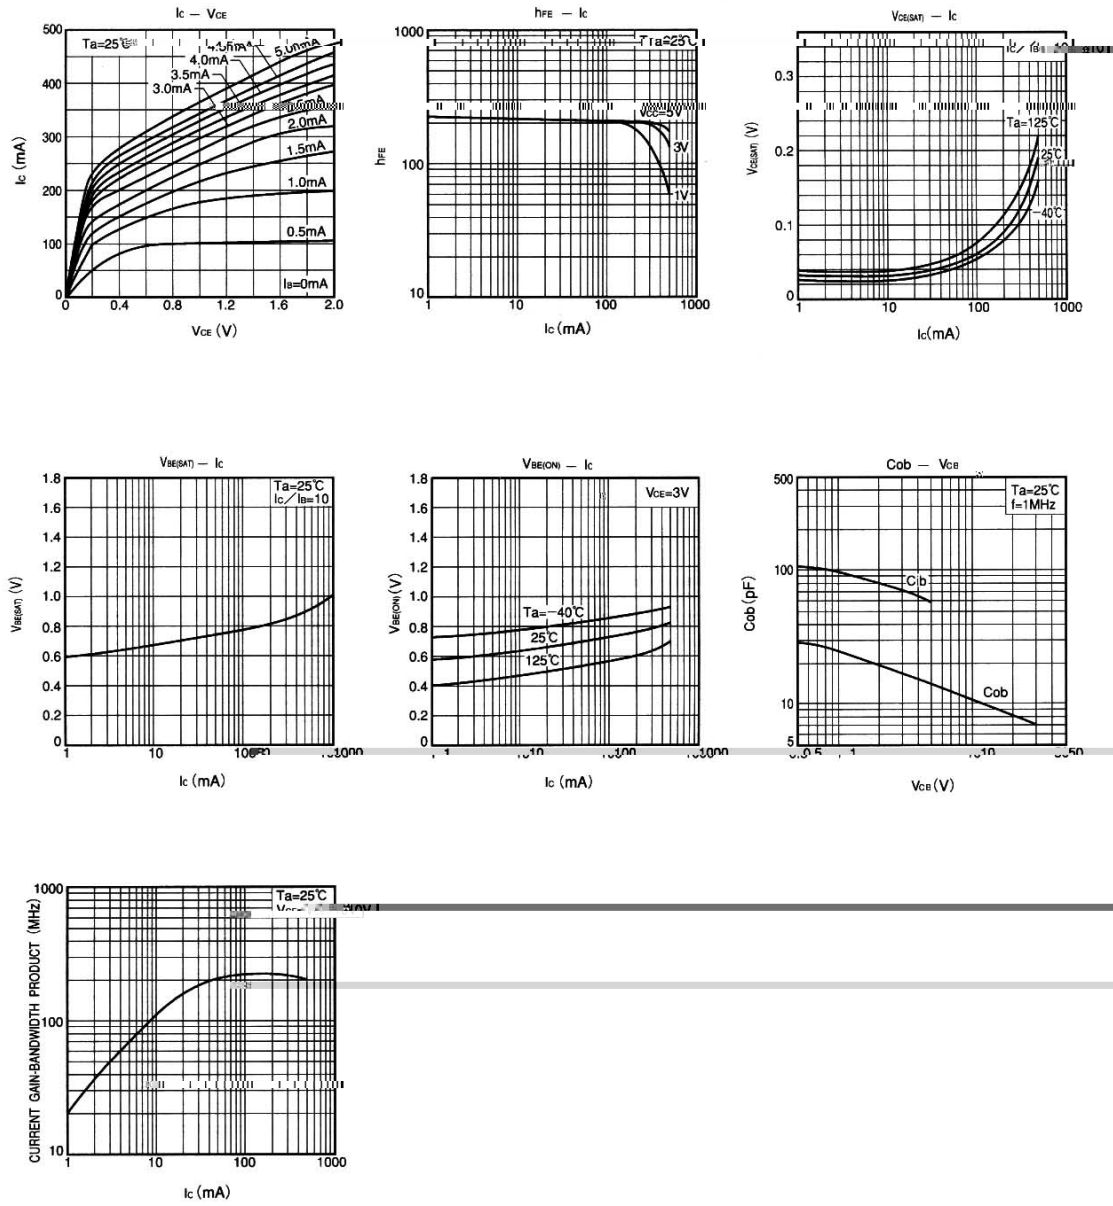

Package Dimensions


SOT-23

单位：mm

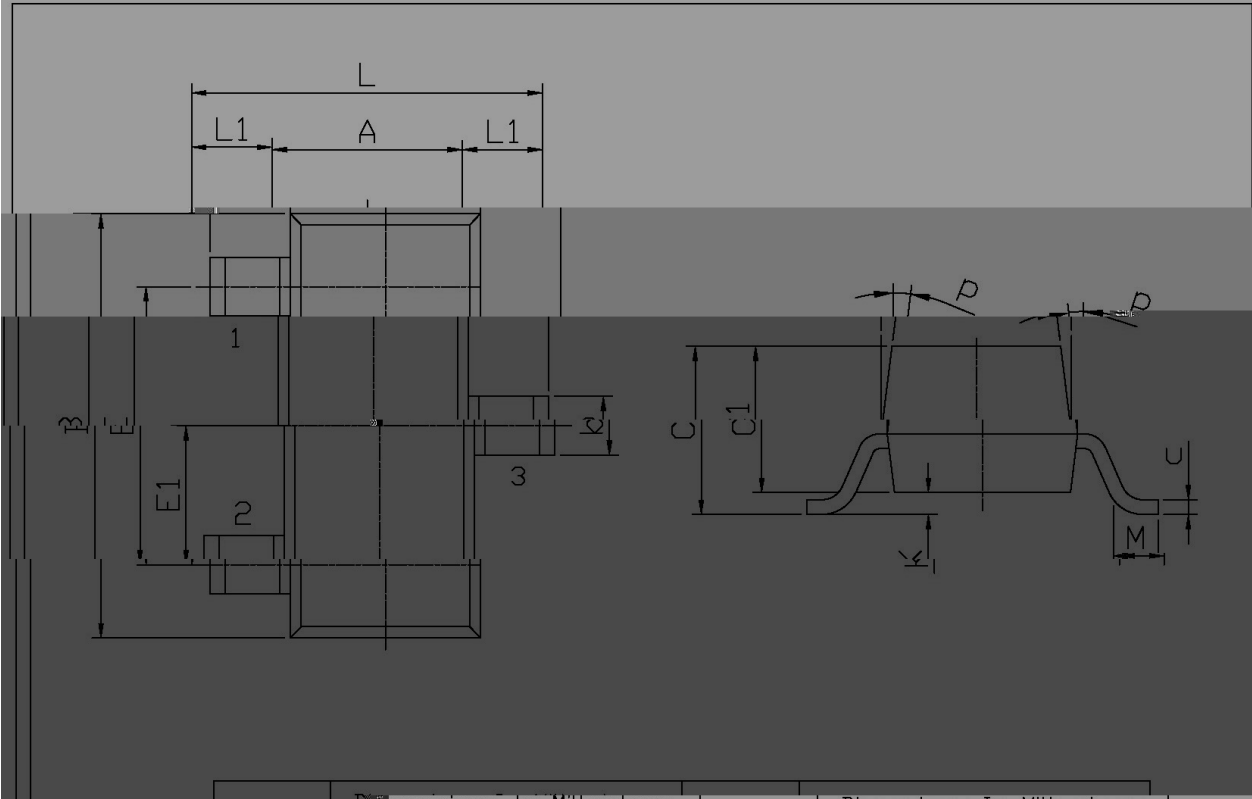


Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
L	2.2	2.7	C	1.20	1.30
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
B	2.70	3.10	K	0	0.10
E	1.70	2.10	M	0.20MIN	
E1	0.85	1.05	D	7°	
b	0.35	0.55			

4. 符号 / Marking Instructions

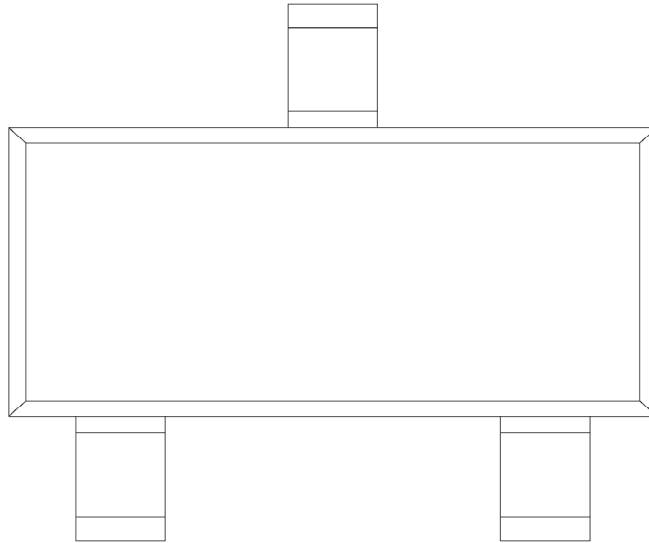

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

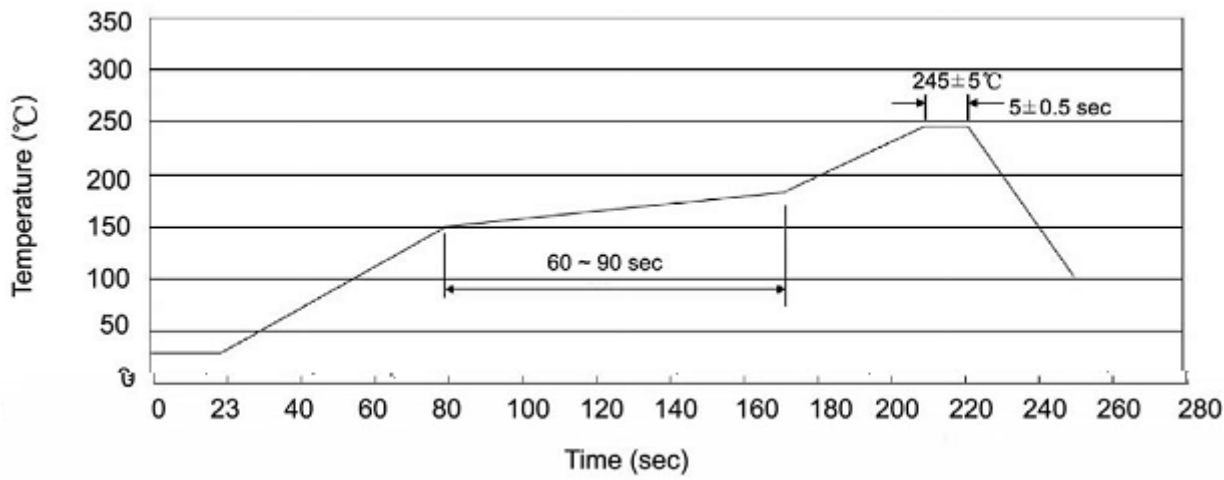

Resistance to Soldering Heat Test Conditions

Packaging SPEC.

Notices