

MMBTA56W

“Y / Descriptions


SOT-323 PNP

• Ę / Features


M MBTA06W

v / Applications

л ~ α = / Equivalent Circuit



ã / ů / Pinning




Ł. H Ć / Marking

		~	

		μ				
						μ
						μ
						μ


Electrical Characteristic Curve

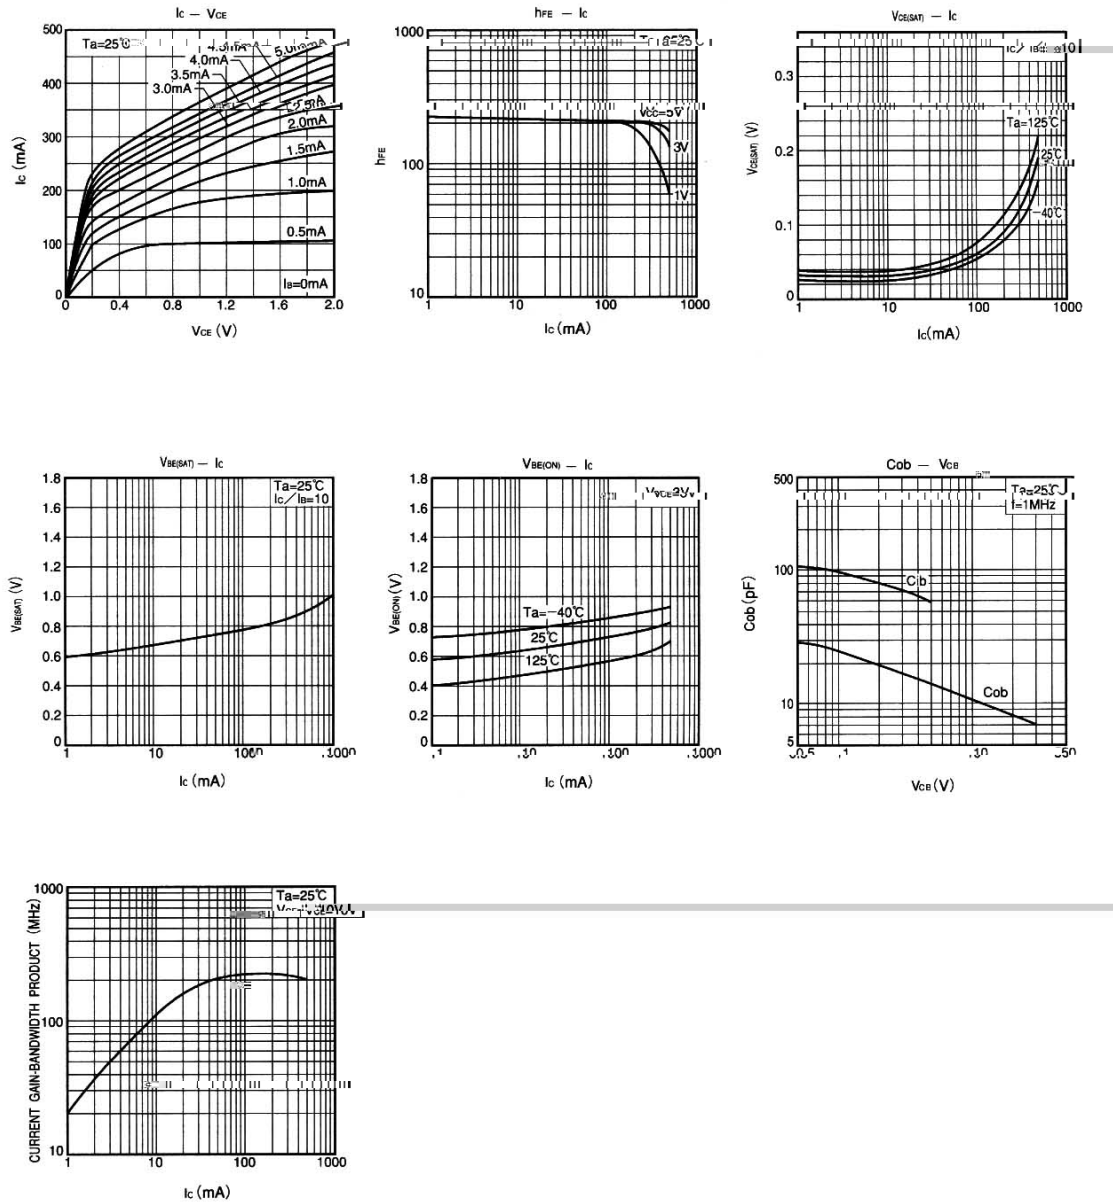


⌘ È Ò Ì ¢ / Package Dimensions

SOT-323


单位: mm

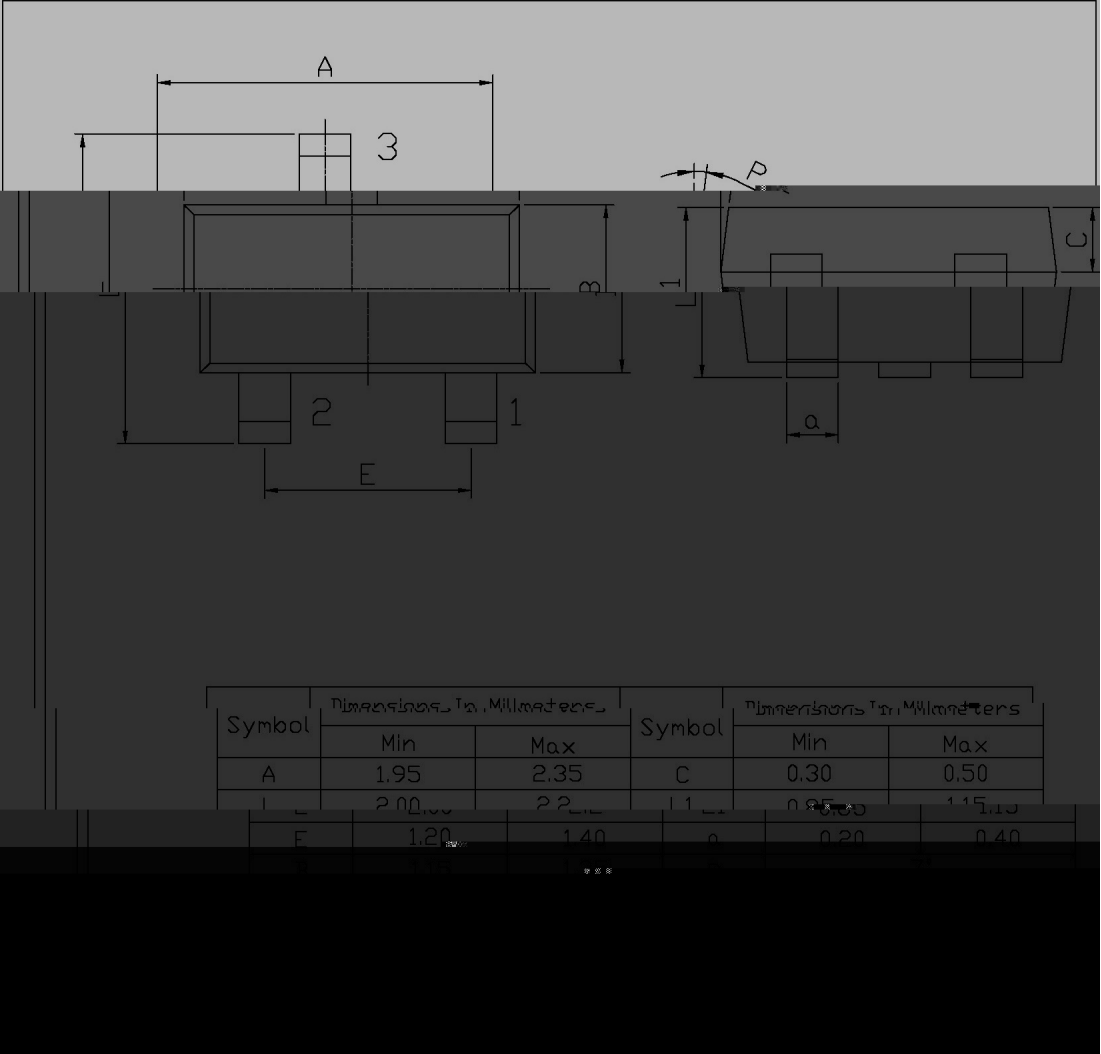

4. 符号 / Marking Instructions

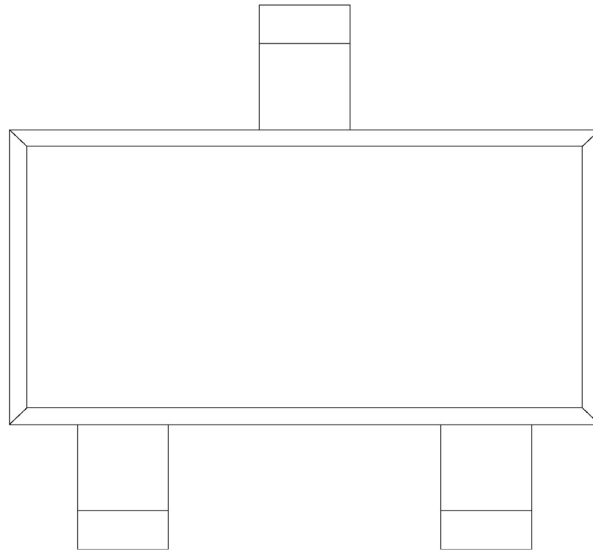

Thermal Characteristics / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

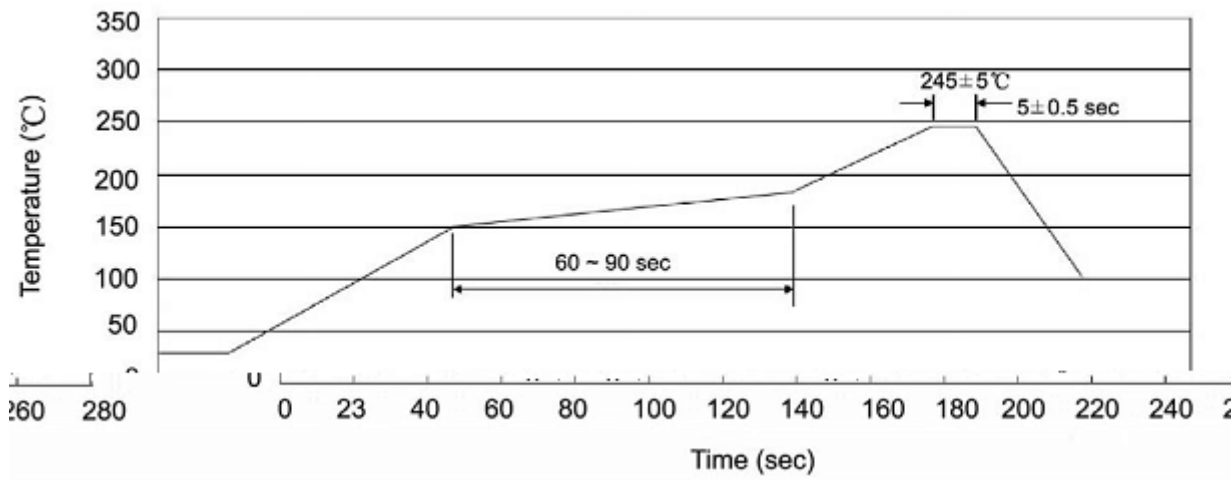

± ± ± ±

Resistance to Soldering Heat Test Conditions

± ± ± ±

Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		