

/ Descriptions

/ Features


2.4V-110V

200mW

/ Applications

200mW SOD-323

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

	θ		
	θ		







						Ω	Ω			

MMSZ52XXBS




DATA SHEET

/ Electrical Characteristic Curve

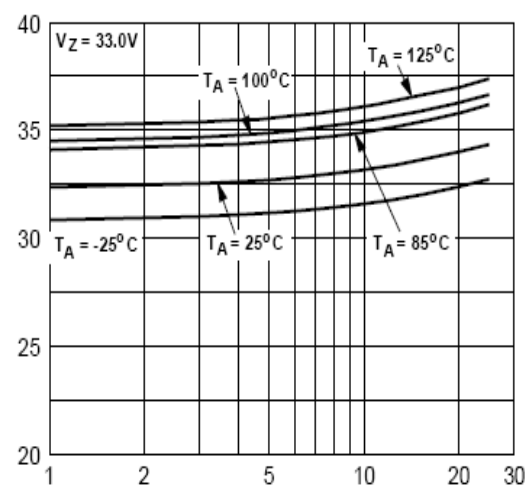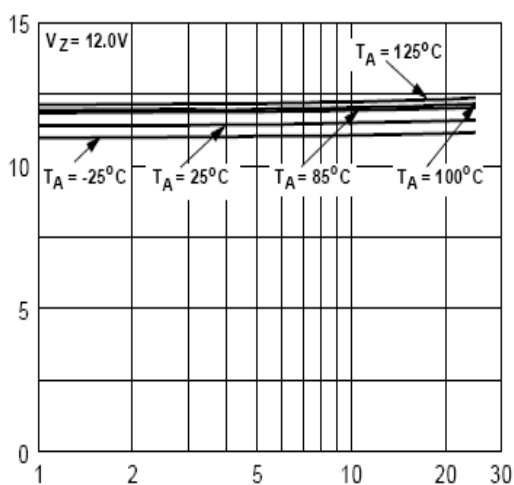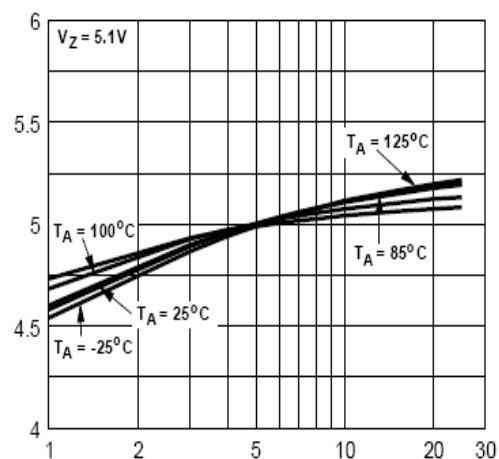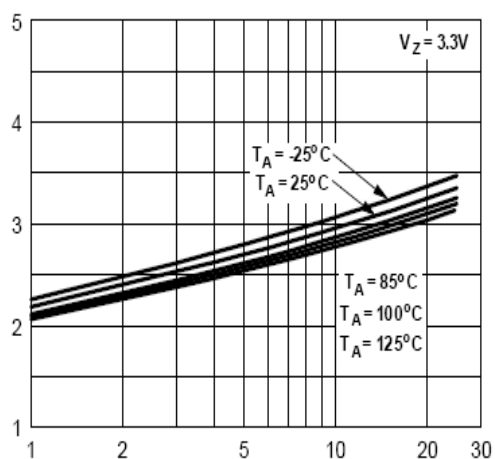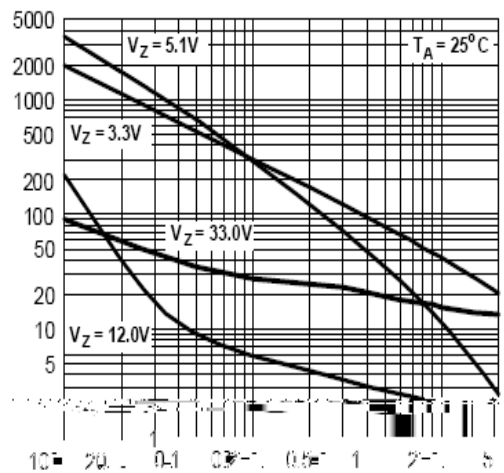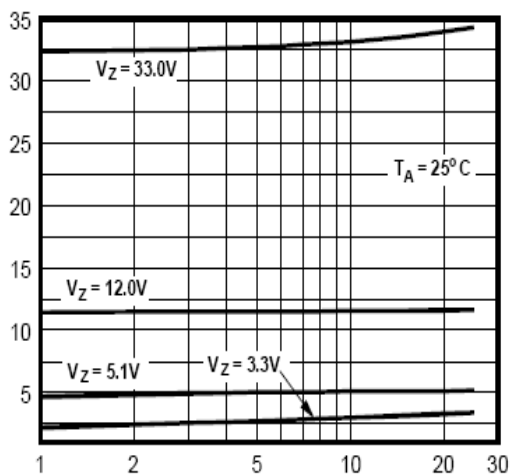

/ Package Dimensions

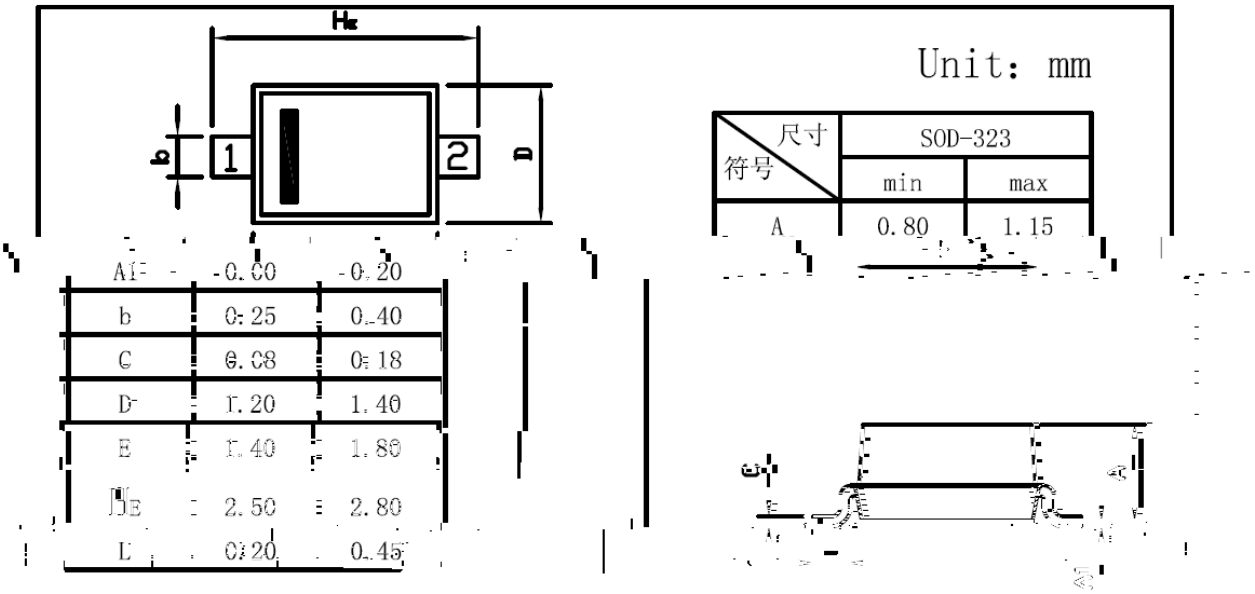


PIN 1 (CATHODE) 2 (ANODE)

23


S 3-3

/ Marking Instructions

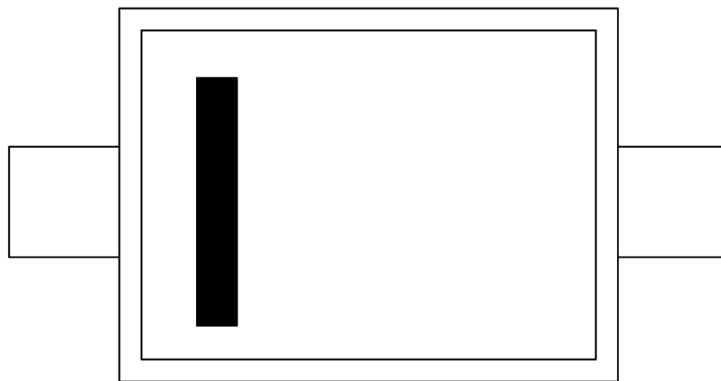

H
H2

() /

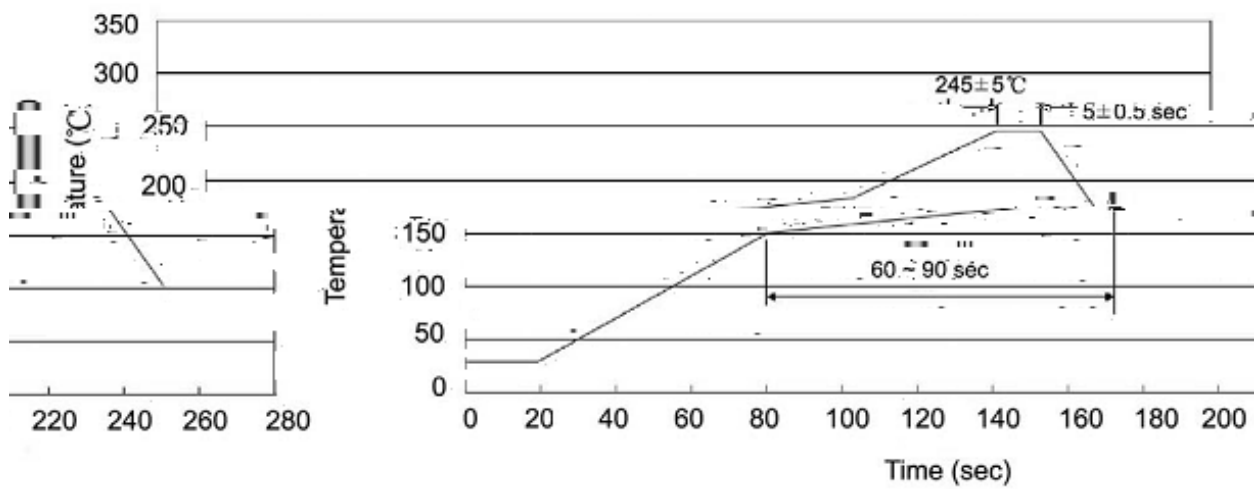

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices