

/ Descriptions

50V~1000V 2.0A SMAF

/ Features


RoHS 2011/65/EU

/ Applications

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

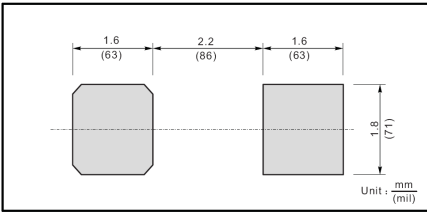


/ Marking


℃	()								
)									
)	θ								℃
									℃

			数值	
--	--	--	----	--

/ Electrical Characteristic Curve

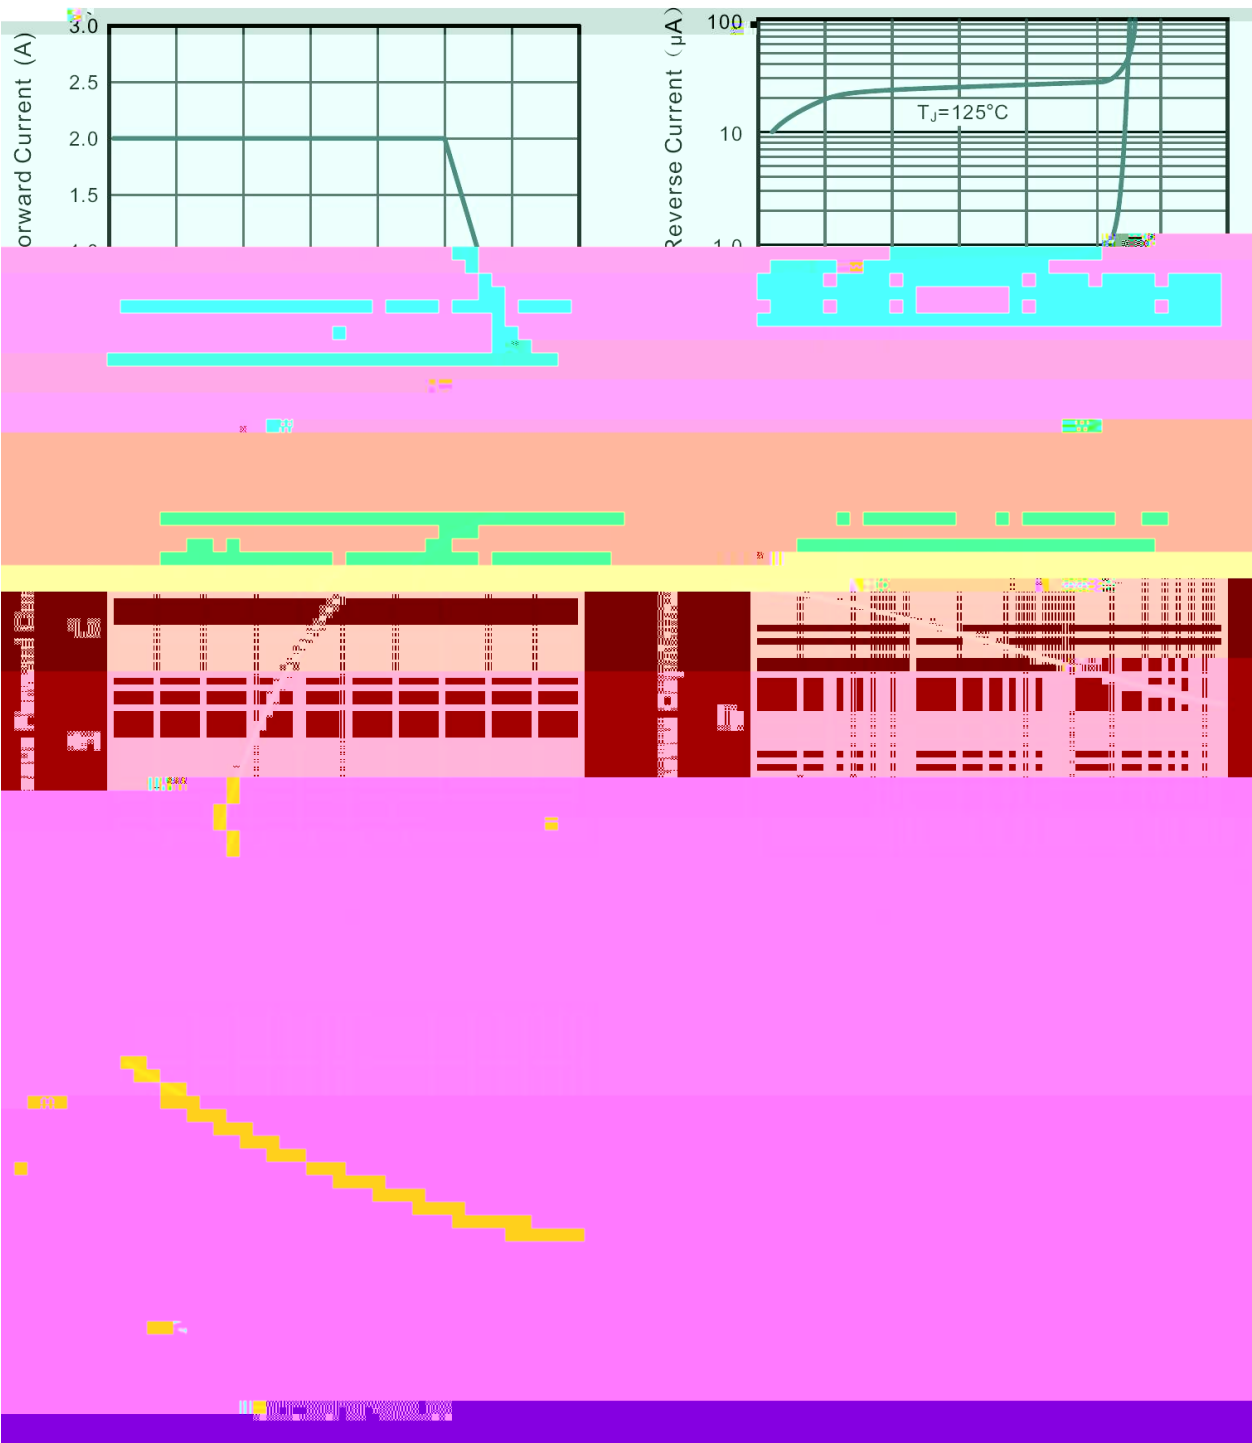


/ Package Dimensions

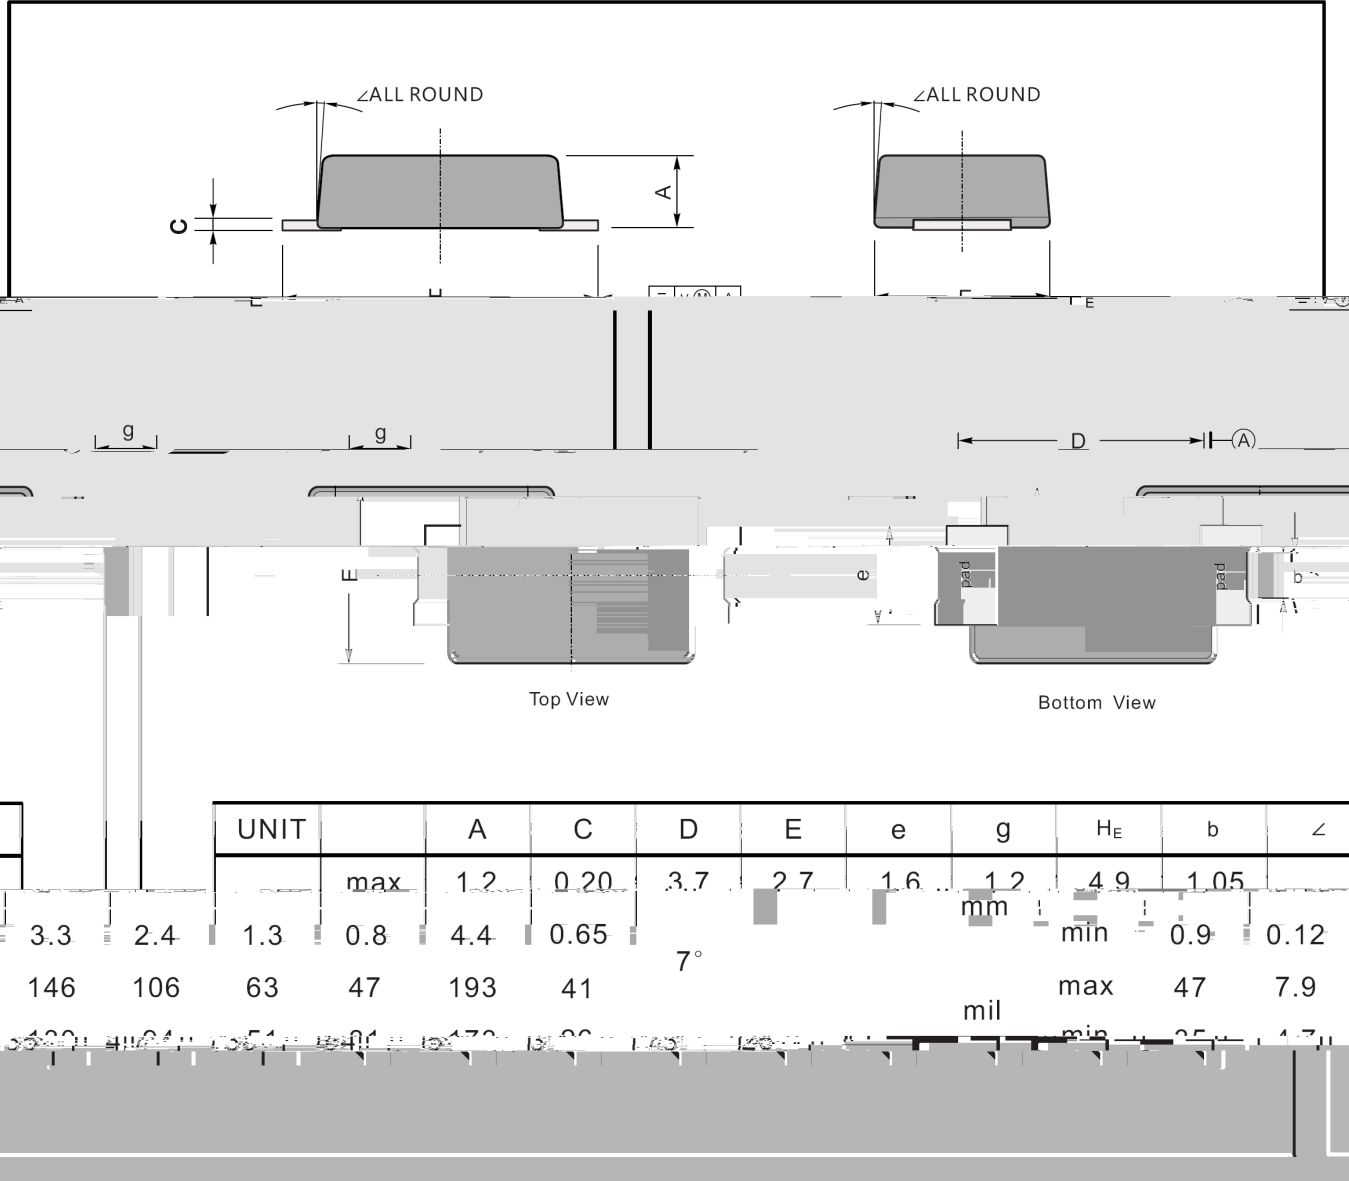

Marking


Type number	Marking code
RS2AF	RS2A
RS2BF	RS2B
RS2DF	RS2D
RS2GF	RS2G
RS2JF	RS2J
RS2KF	RS2K
RS2MF	RS2M

/ Marking Instructions

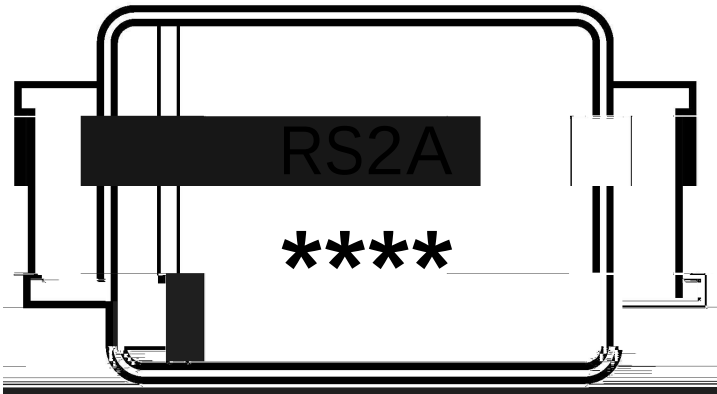

RS2A			
****	1 *	3 *	
RS2A			
****	*	*	

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

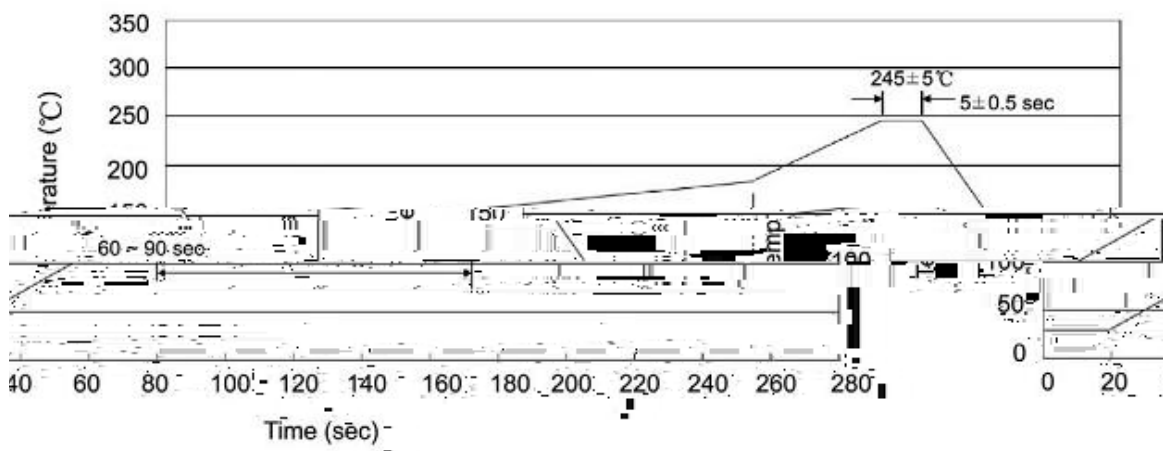

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

Ê Æ SQì &1"„Uf\$ /sec. /66w <00723 0 TD /