

RS3AB~RS3MB



DATA SHEET

50V~1000V 3.0A SMB



/ Absolute Maximum Ratings(Ta=25)


	θ								
	θ								

/ Electrical Characteristics(Ta=25)

								μ
								μ


/ Electrical Characteristic Curve

Fig.1 Maximum Average Forward Current Rating

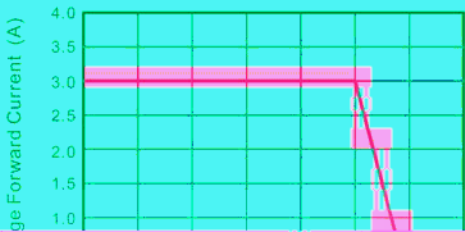

Case Temperature (°C)

Fig.2 Typical Reverse Characteristics

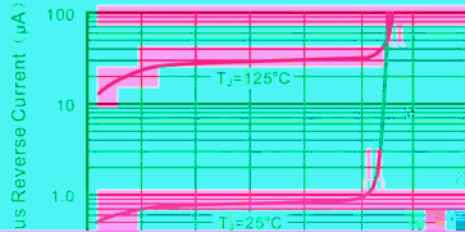


Potential of Rated Peak Reverse Voltage (V)

Fig.3 Typical Instantaneous Forward Characteristics




Fig.4 Typical Junction Capacitance

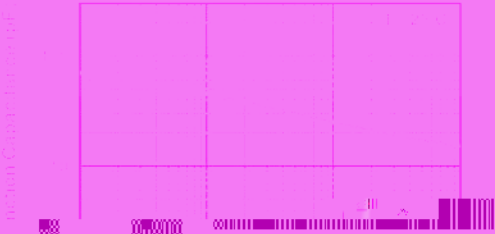

/ Marking Instructions

Marking	
Type number	Marking code
RS3A	RS3AB
RS3B	RS3BB
RS3D	RS3DB
RS3G	RS3GB
RS3J	RS3JB
RS3K	RS3KB
RS3M	RS3MB

/ Marking Instructions

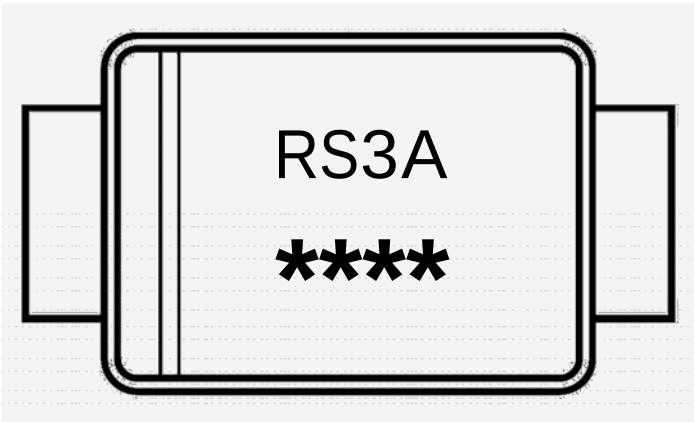


RS3A

1

3

RS3A

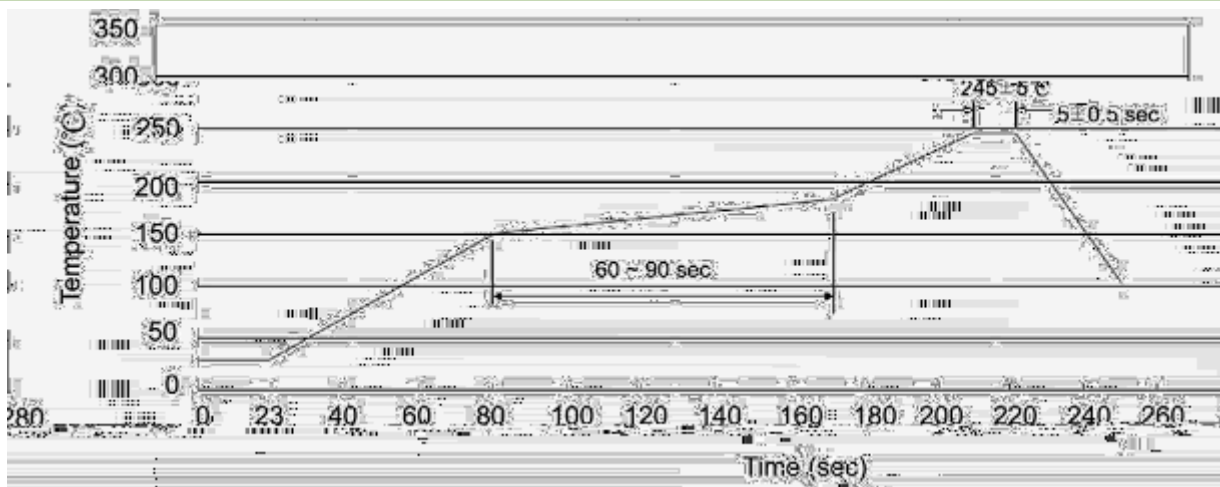 $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

封装形式

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱

/ Notices