

Rev.A Jun.-2020






Surface Mount Ultrafast Recovery Rectifier,Reverse Voltage:1000V,Forward Current:4.0A, SMBF package.

Glass Passivated Chip Junction, High efficiency, Lead free in comply with EU R0HS 2011/65/EU directives, For surface mounted applications. Halogen free product.

General purpose.

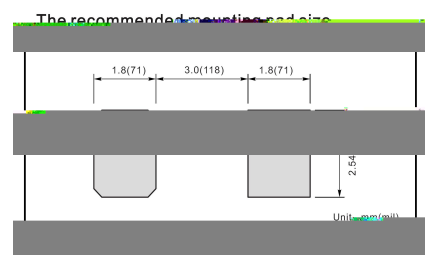

See Marking Instructions.




参数 Parameter	参数符号 Symbol	数值 Rating	单位 Unit
		RS4MBF	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	1000	V
Maximum RMS voltage	V_{RMS}	700	V
Maximum DC Blocking Voltage	V_{DC}	1000	V
Maximum Average Forward Rectified Current at $T_c = 100^\circ\text{C}$	$I_F (AV)$	4.0	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I_{FSM}	100	A
Typical Junction Capacitance at $V_R=4V$, $f=1\text{MHz}$	C_j	40	pF
Typical Thermal Resistance ⁽¹⁾	$R_{\theta JA}$	40	$^\circ\text{C/W}$
	$R_{\theta JC}$	12	
Operating and Storage Temperature Range	T_j, T_{stg}	-55~+150	$^\circ\text{C}$

Note:

(1) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

参数 Parameter	参数符号 Symbol	测试条件 Test condition	数值 Rating	单位 Unit
			RS4MBF	
Maximum Instantaneous Forward Voltage	V_F	$I_F=4.0A$	1.3	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_a=25^\circ\text{C}$	10	μA
		$T_a=125^\circ\text{C}$	150	
Maximum Reverse Recovery Time	T_{rr}	$I_F=0.5A$ $I_R=1.0A$ $I_{rr}=0.25A$	500	ns

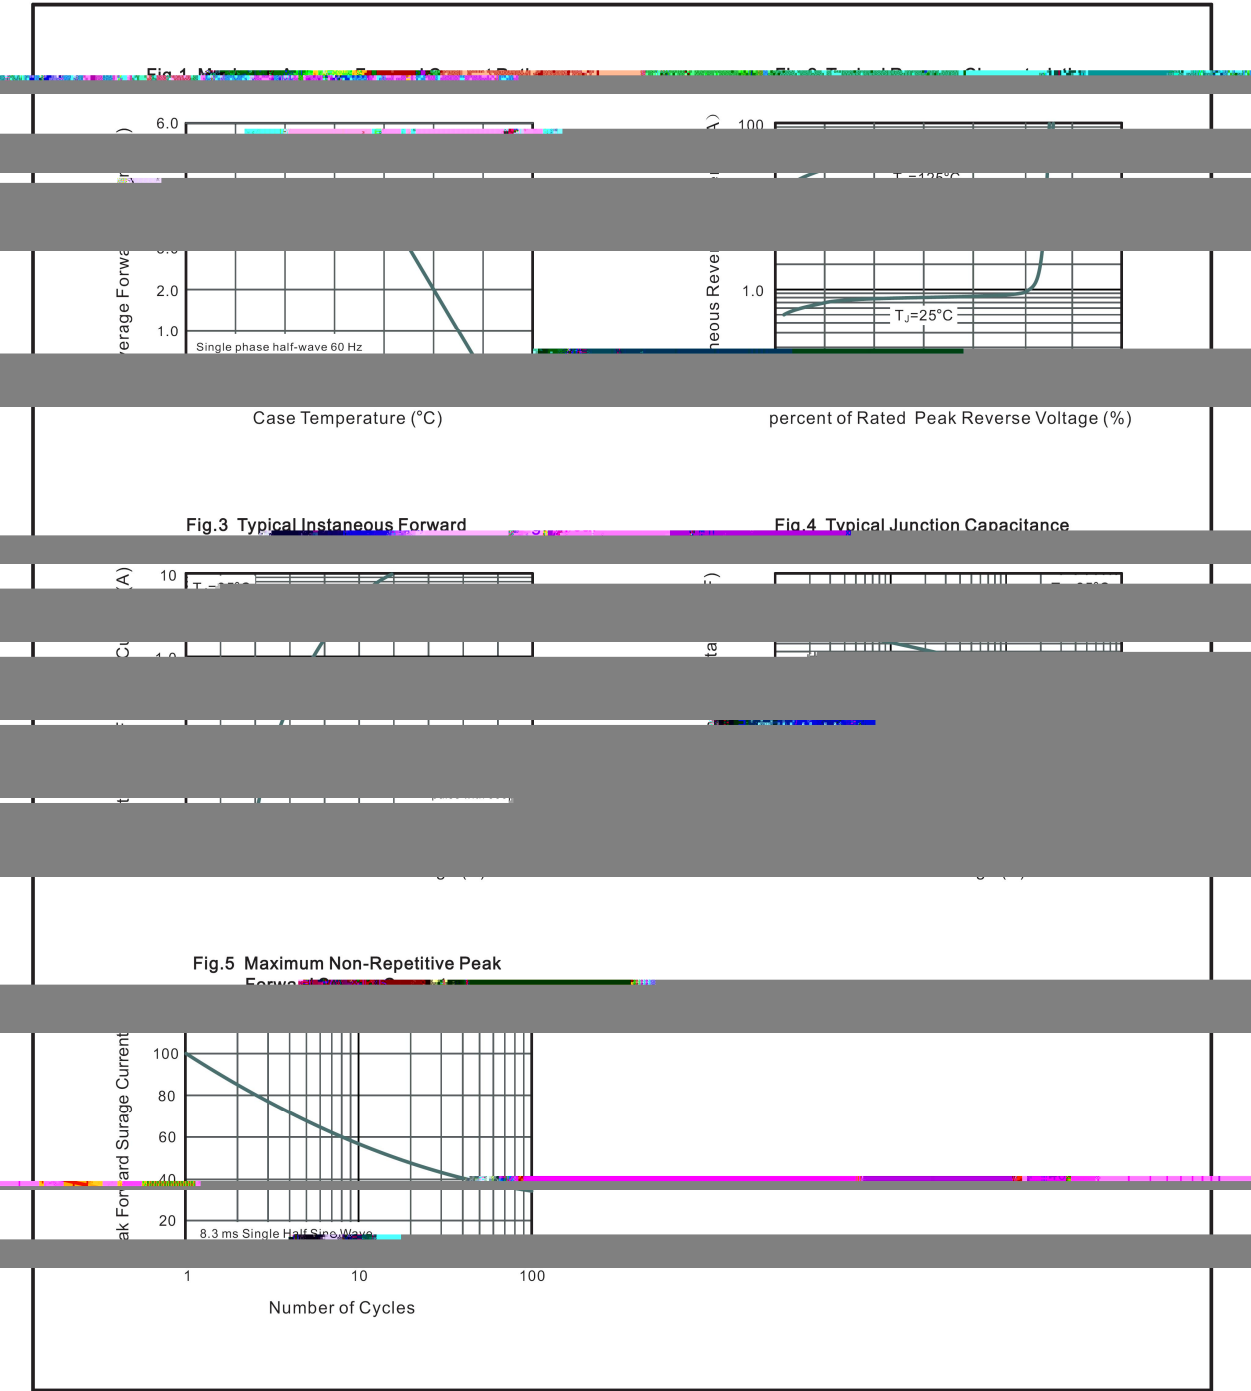



SMBF





Marking


Type number	Marking code
RS4MBF	R4MB

3 *

Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No
Code



Temperature Profile for IR Reflow Soldering(Pb-Free)

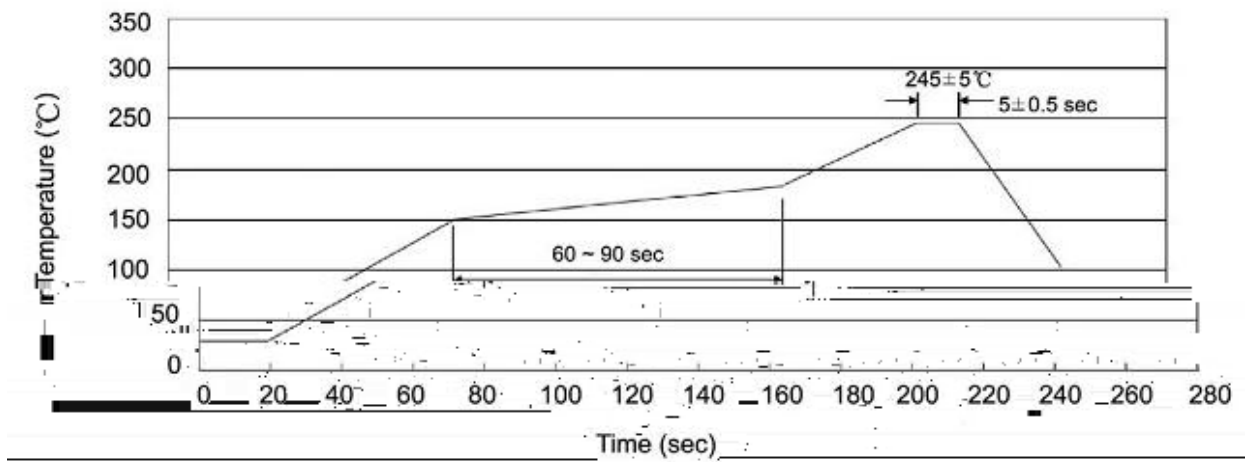

Note:

- | | | | | | |
|---|-----|-----|----|----------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

260 5 10 1 sec. Temp.:260 5 Time:10 1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SMBF	5000	2	10000	7	50000	13" ×12	336X332X40	345X345X235