

Rev.A May.-2018

Y

50V~1000V

2.0A SMB

Surface Mount General Purpose Silicon Rectifiers, Reverse Voltage: 50 to 1000V, Forward Current: 2.0A, SMB package.

• È

RoHS

2011/65/EU

Glass Passivated Chip Junction, Fast reverse recovery time, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. Halogen free product.

v

General purpose.

η ~ ǻ =




ǻ ǻ ǻ



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

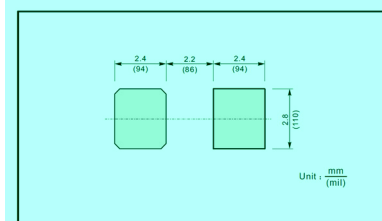

ǻ ǻ ǻ

See Marking Instructions.

Rev.A May.-2018

Parameter	Symbol	Rating							Unit
		S2AB	S2BB	S2DB	S2GB	S2JB	S2KB	S2MB	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V

Fig.1 Forward Current Derating Curve



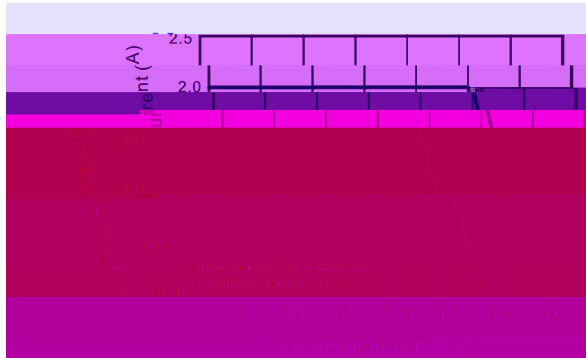



Fig.2 Typical Instantaneous Reverse Characteristics

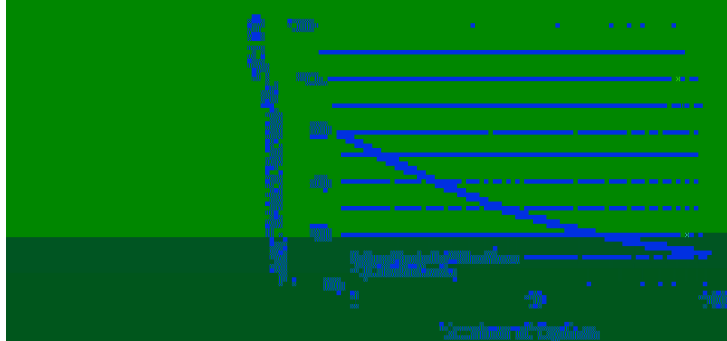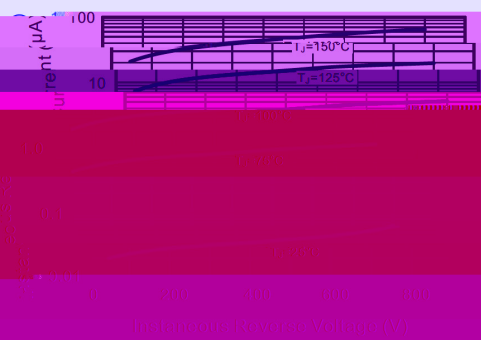

Rev.A May.-2018

0 É Ø L f

SMB

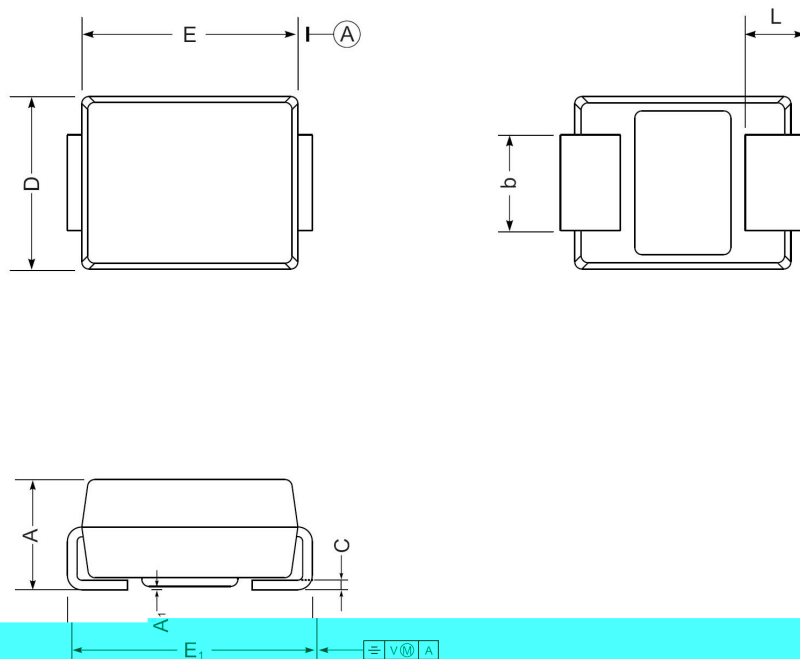


SMB mechanical data

UNIT		A	E	D	E ₁	A ₁	L	C	b
	max	2.44	4.70	3.94	5.59	0.20	1.53	0.305	2.22
	min	2.13	4.06	3.3	5.08	0.05	0.8	0.152	1.9
	max	96	185	155	220	7.9	59	12	87
	min	84	160	130	200	2.0	32	6	75

4. 符号

Marking	
Type number	Marking code
*S2ABD	S2A
S2BB	S2B
S2DB	S2D
S2GB	S2G
S2IB	S2I
S2JBD	S2J
S2IVB	S2M

1. 符号

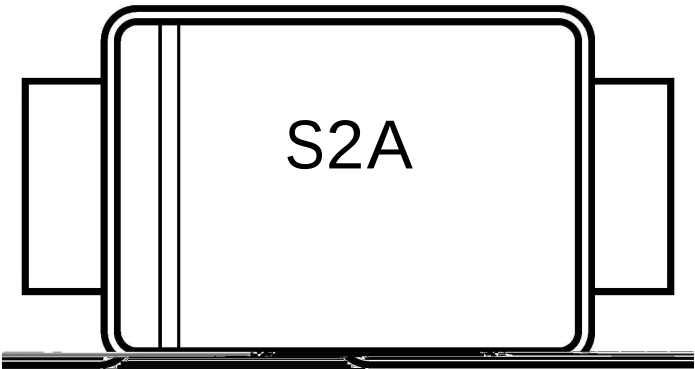

S2A

**** 1 * 3 *


Note:

S2A Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code

Rev.A May.-2018

Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0lueh,

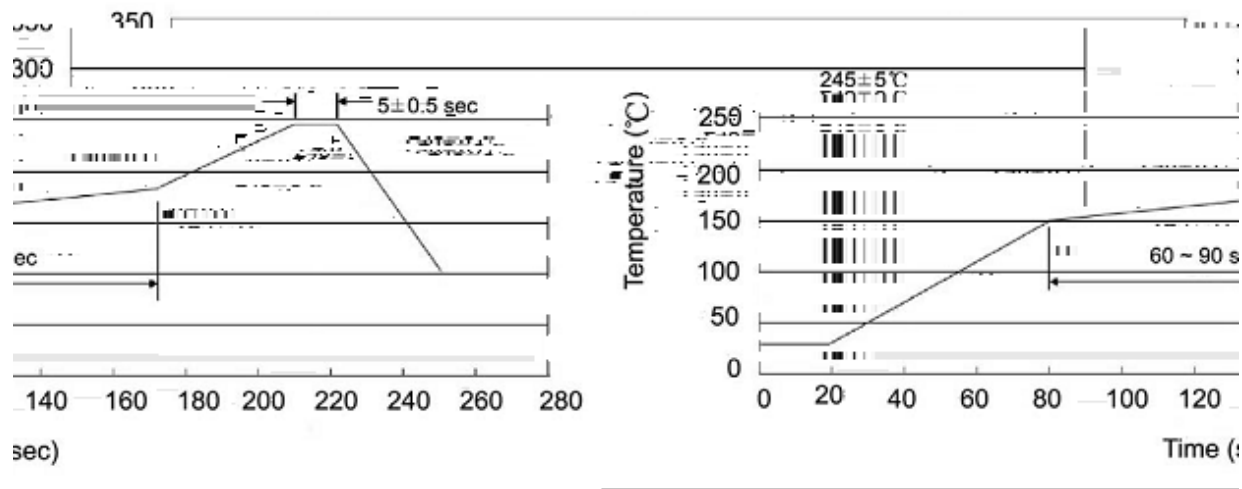

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

1 0 Y T

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

9 —

/ REEL

Package Type	Units 包装数量					Dimension	包装尺寸 (unit: mm ³)	
封装形式	只	卷盘	卷盘	盒	只	盒箱	只	箱