

/ Descriptions

600W,

/ Features


,HF Product.

/ Applications

/ Equivalent Circuit




/ Pinning

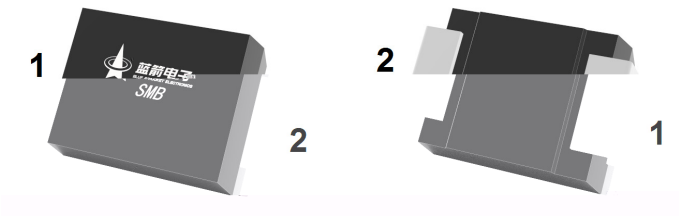

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

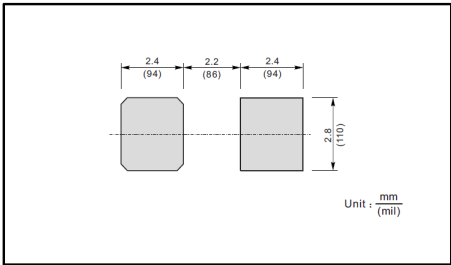

/ Marking

/ Absolute Maximum Ratings(Ta=25)

			±	
			±	
		θ		
		θ		
		θ		

μ

[illegible]

[illegible]

/ Electrical Characteristic Curve

Fig.1 Peak Pulse Power Rating Curve

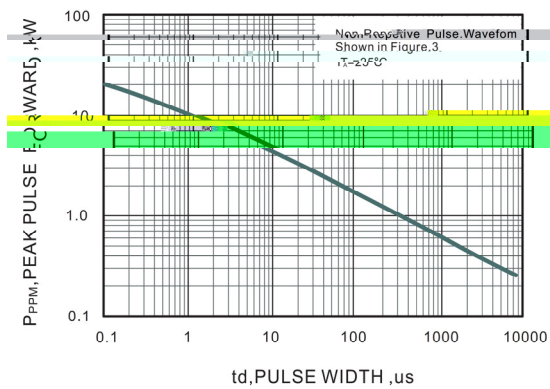


Fig.2 Forward Current Derating Curve

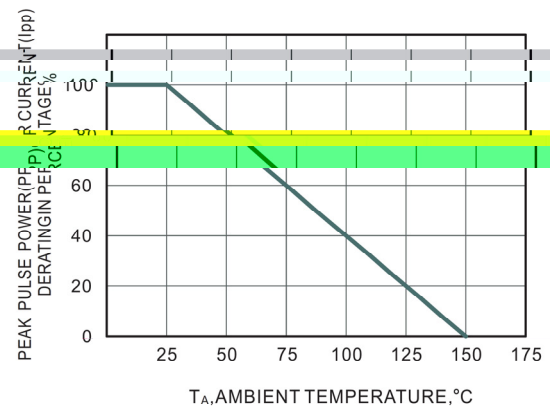


Fig.3 Pulse Waveform



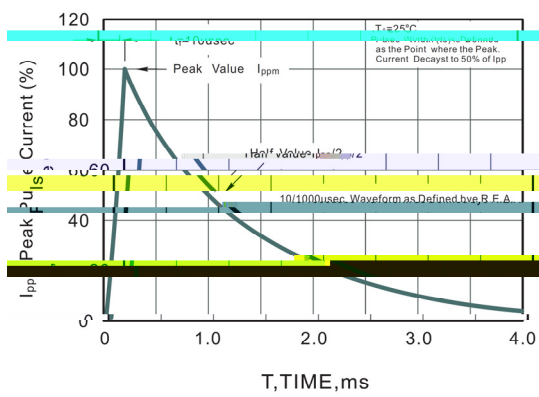


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

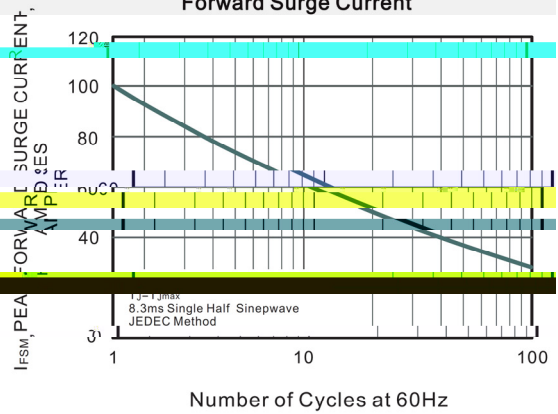


/ Package Dimensions

SMB

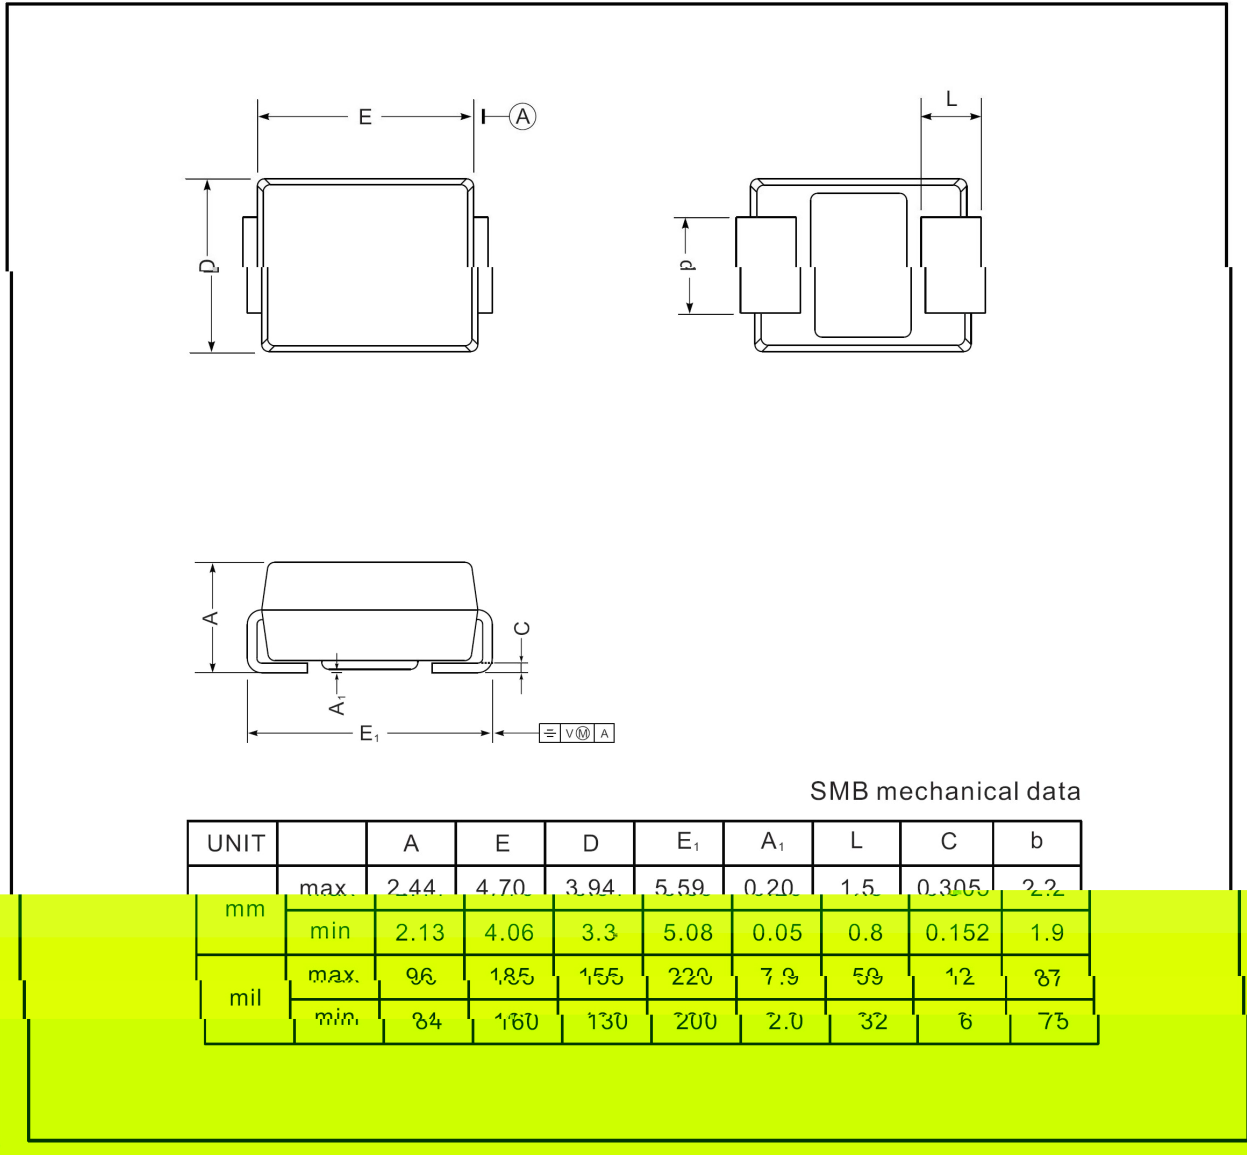



/ Marking Instructions

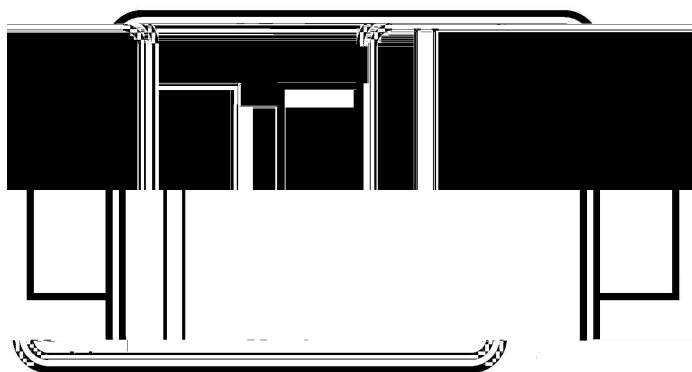

KE

KE

/ Marking Instructions



AE

AE

[illegible] $\pm$ $\pm$

封装形式