


TO-126 NPN Silicon NPN transistor in a TO-126 Plastic Package.


TIP127L
 Complement to TIP127L.

Medium power linear switching applications.




PIN1 Emitter PIN 2 Collector PIN 3 Base


See Marking Instructions.

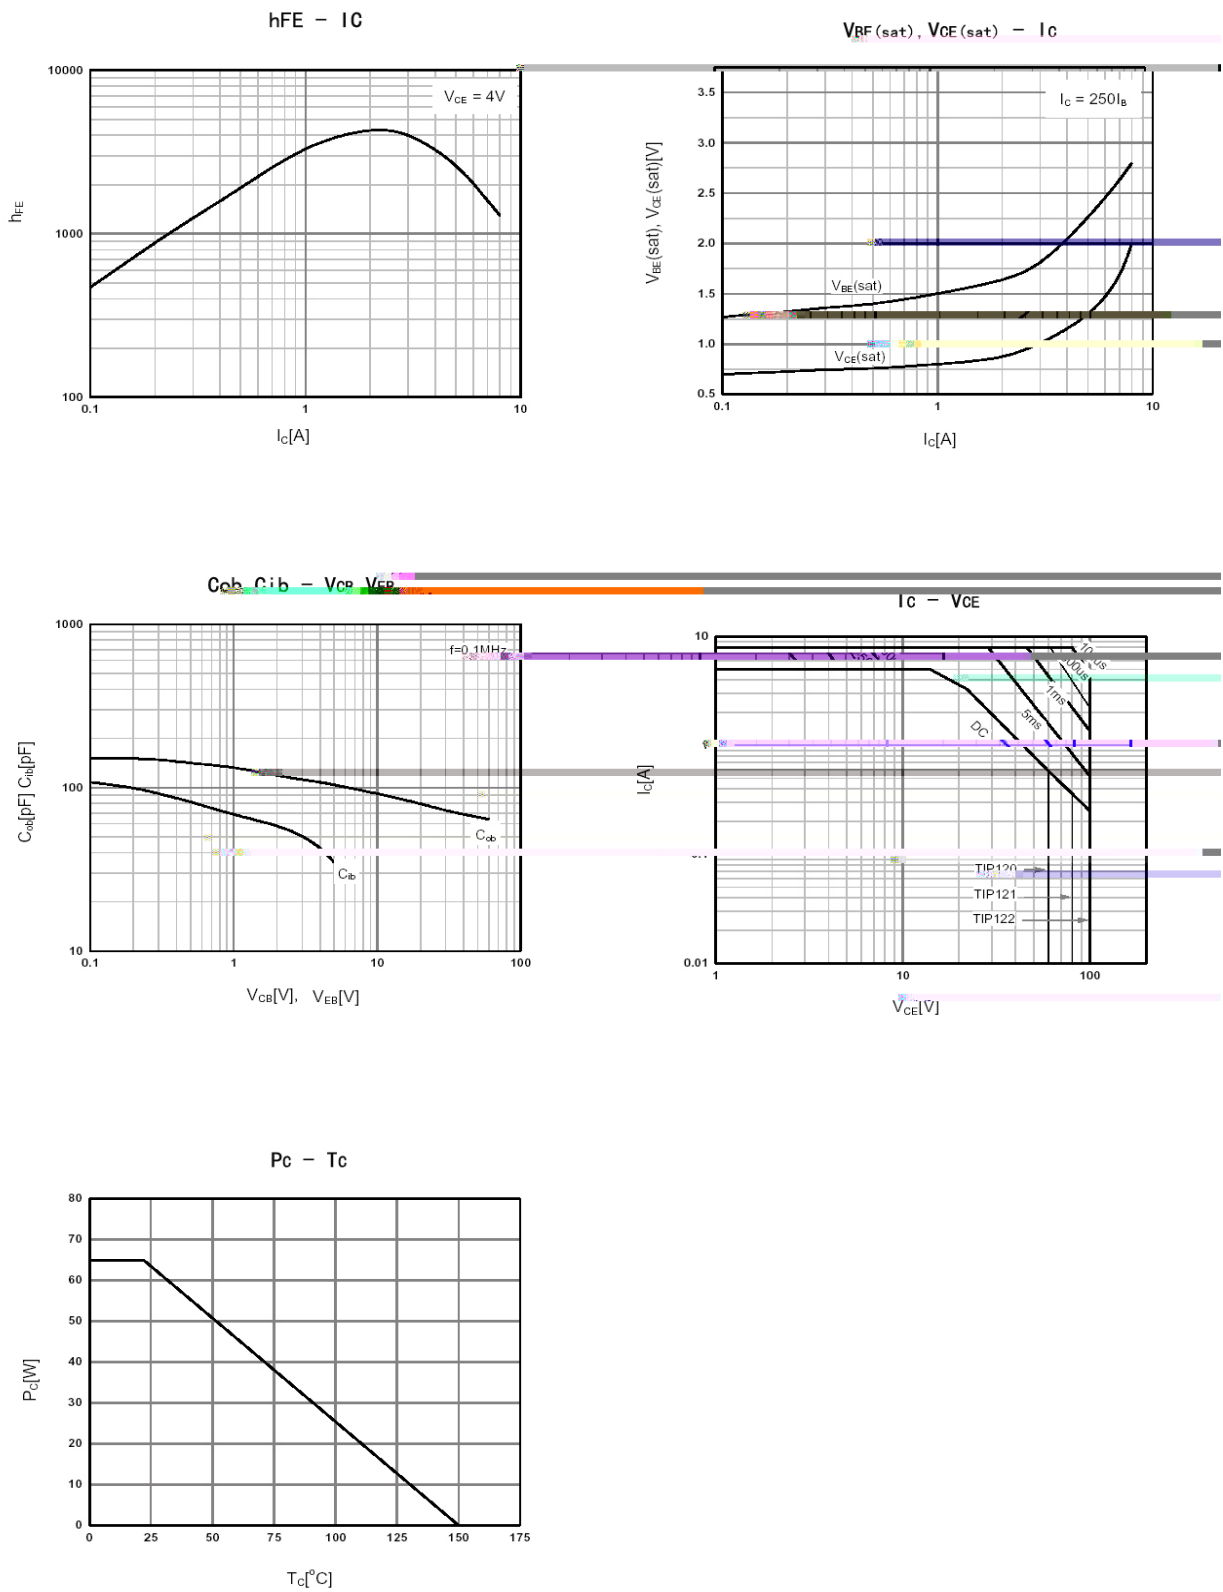

T□-126

单位: mm

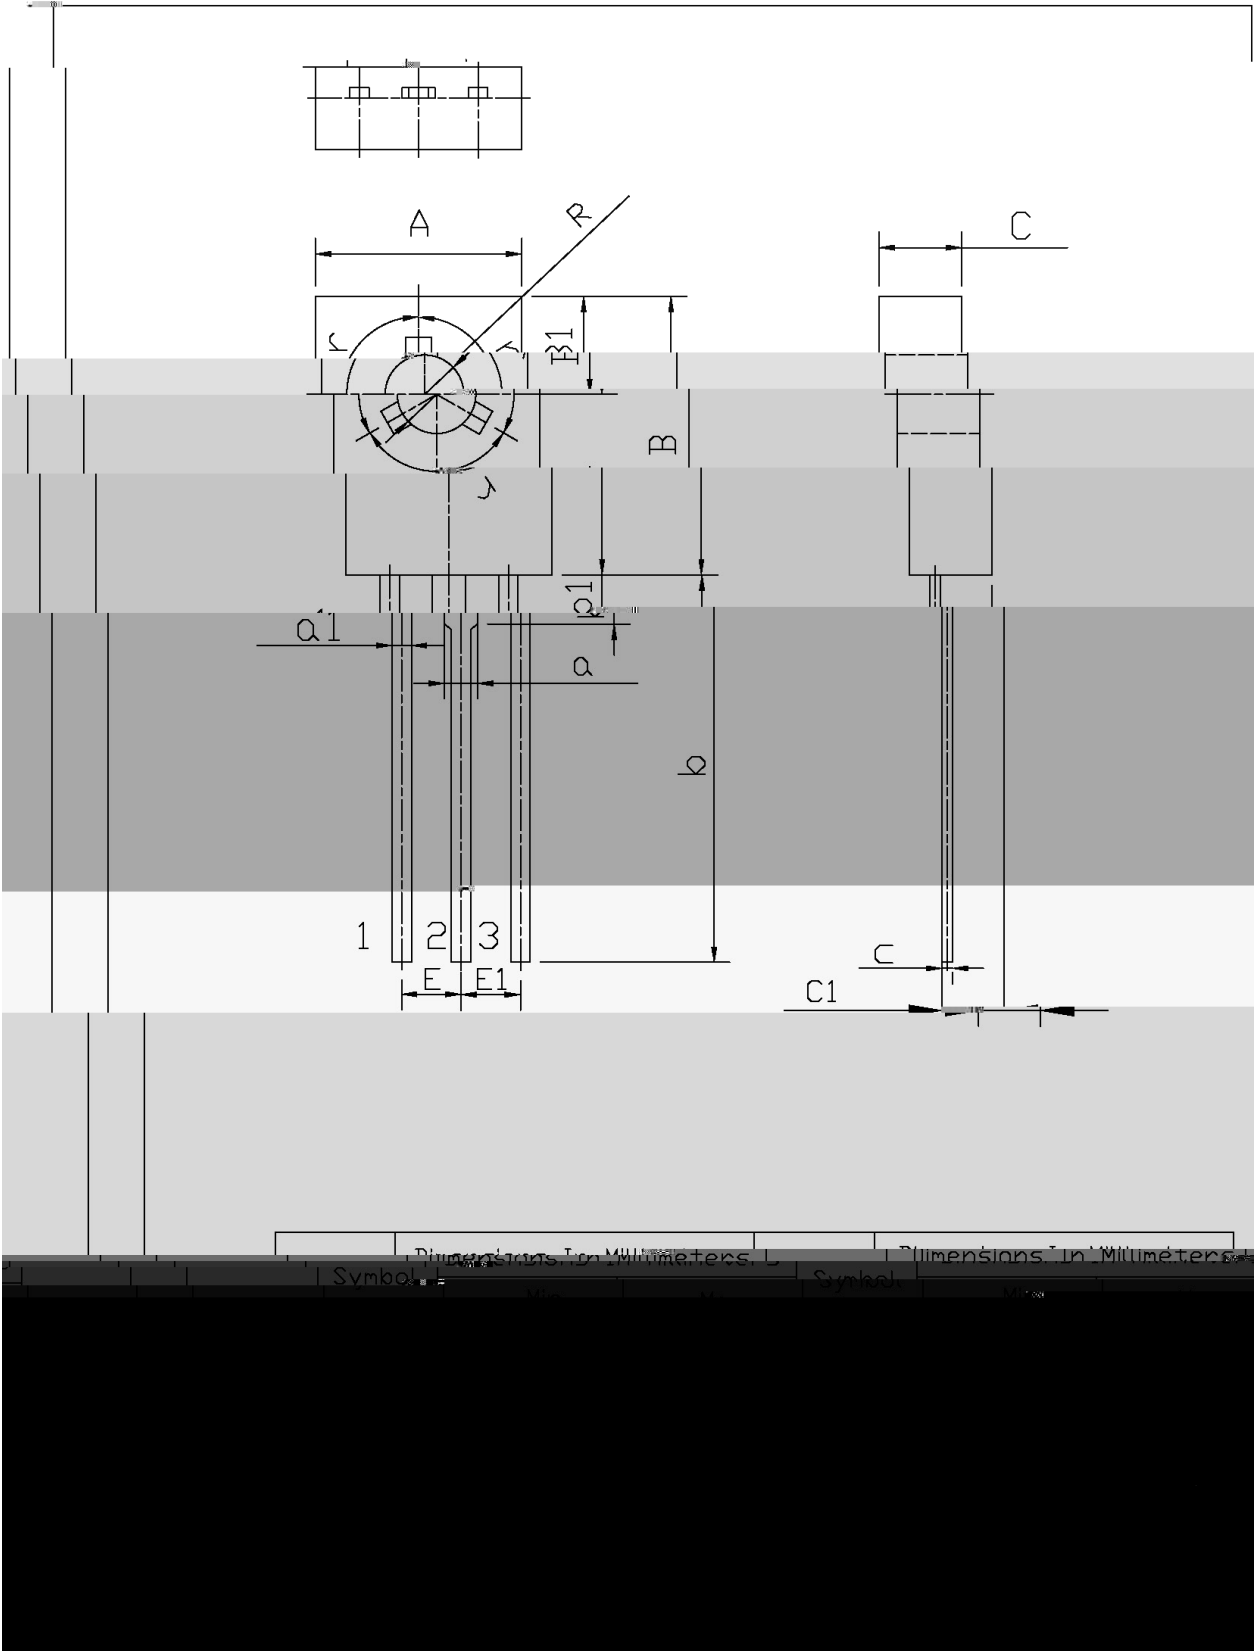

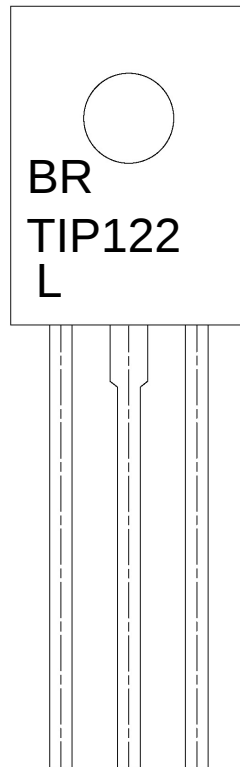

BR

TIP122

L:

TO-126

Note:

BR: Company Code

TIP122: Product Type.

L: TO-126 Package

****: Lot No. Code, code change with Lot No.



Note:			
1	25 150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5	5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3	2 10	/sec.	3. Cooling Speed: 2~10 /sec.

270±5	10±1 sec.	Temp.:270±5
-------	-----------	-------------