







**/ Descriptions****/ Features****/ Applications****/ Equivalent Circuit****/ Pinning****/  $h_{FE}$  Classifications & Marking**

/ Absolute Maximum Ratings(Ta=25 )



/ Electrical Characteristics(Ta=25 )


/ Electrical Characteristic Curve

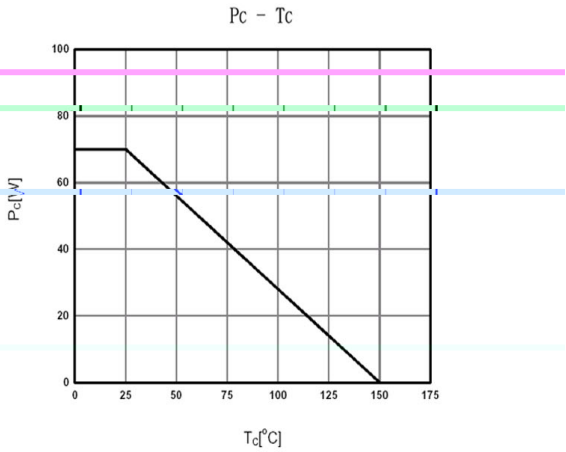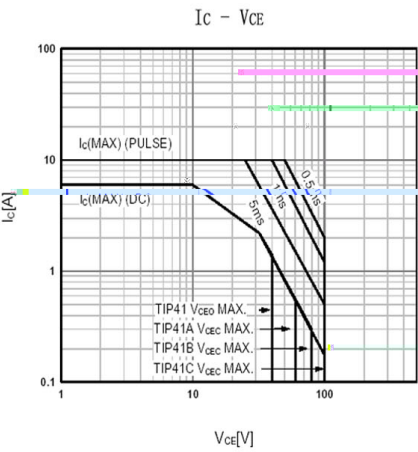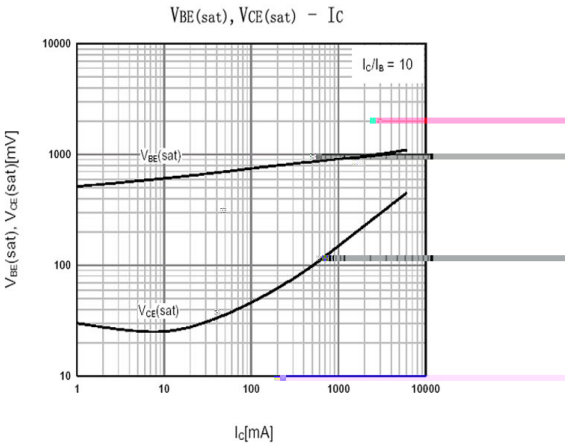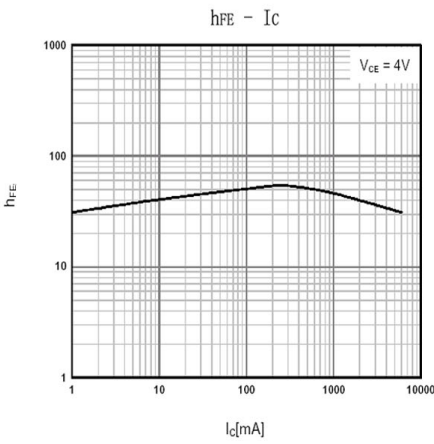

## / Package Dimensions


T0-220

单位:

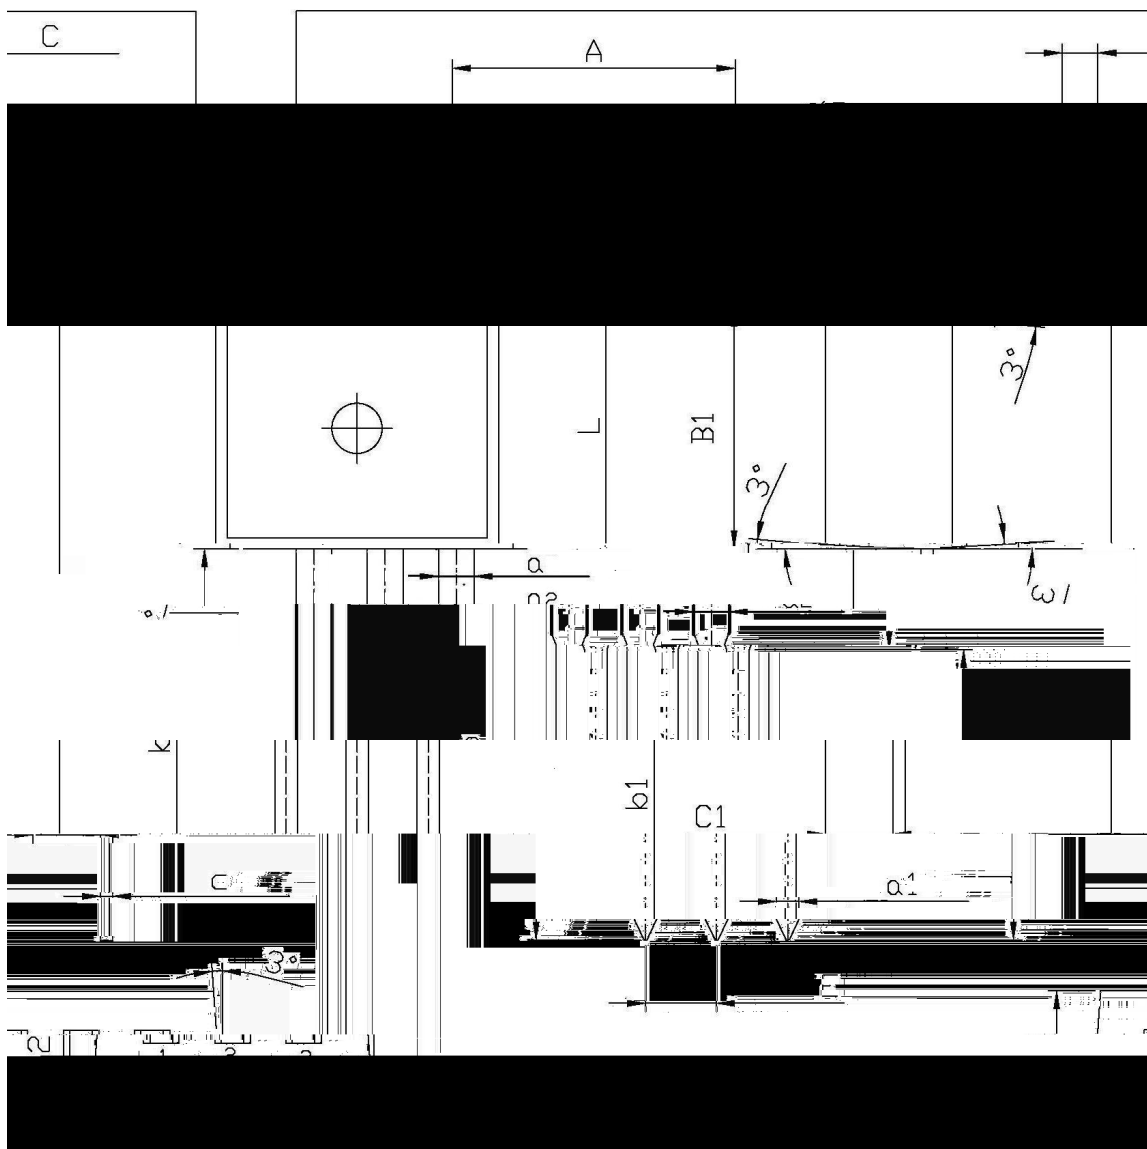


| Dimensions in Millimeters |      |      | Dimensions in Millimeters |      |      |
|---------------------------|------|------|---------------------------|------|------|
| Symbol                    | Min  | Max  | Symbol                    | Min  | Max  |
| A                         | 9.8  | 10.2 | C                         | 1.2  | 1.4  |
| B                         | 9.0  | 9.4  | D                         | 1.6  | 1.8  |
| E                         | 16.1 | 16.5 | F                         | 15.7 | 16.3 |
| G                         | 10.5 | 10.9 | H                         | 19.2 | 19.8 |
| I                         | 22   | 24   | J                         | 0.4  | 0.6  |
| K                         | 1.32 | 1.48 | L                         | 0.2  | 0.3  |
| M                         | 0.24 | 0.28 | N                         | 1.25 | 1.45 |

## / Marking Instructions

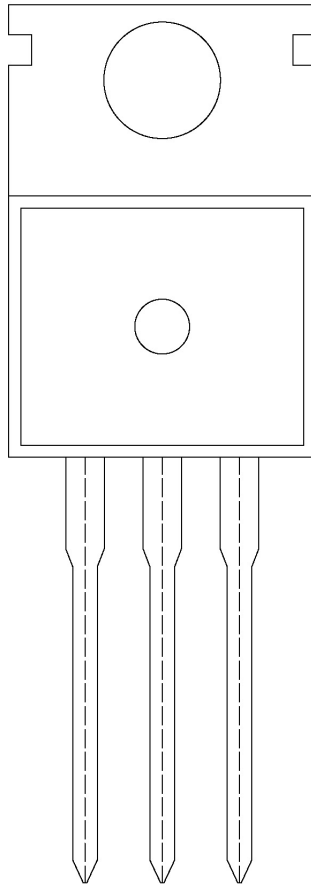

(     ) / Temperature Profile for Dip Soldering(Pb-Free)

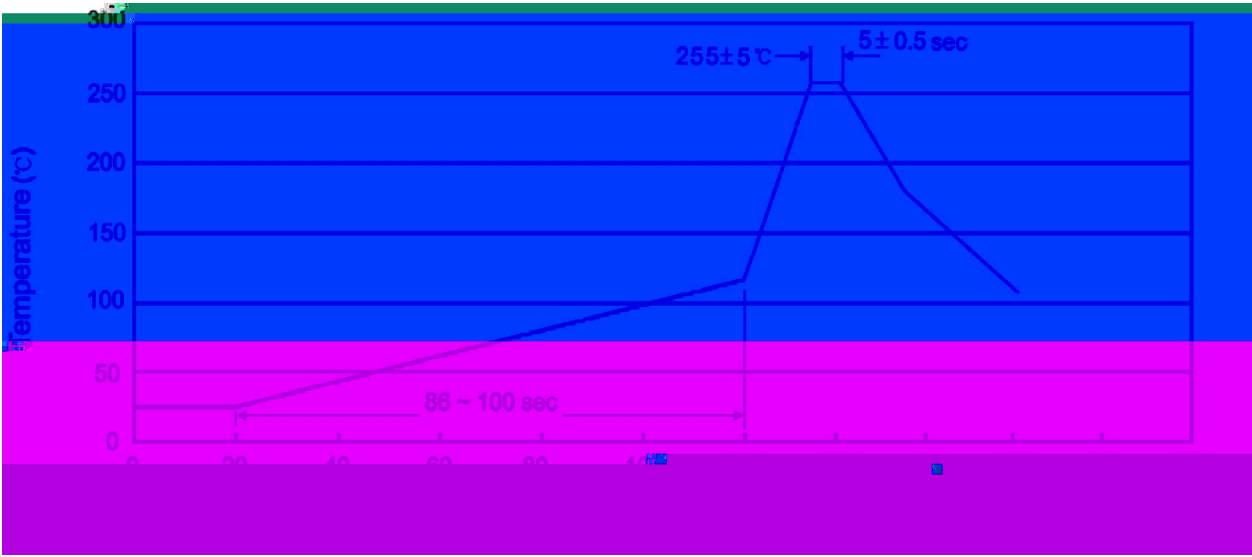

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |

|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |

/ Notices