


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning



/ h_{FE} Classifications & Marking

--	--	--	--	--	--	--


/ Electrical Characteristic Curve

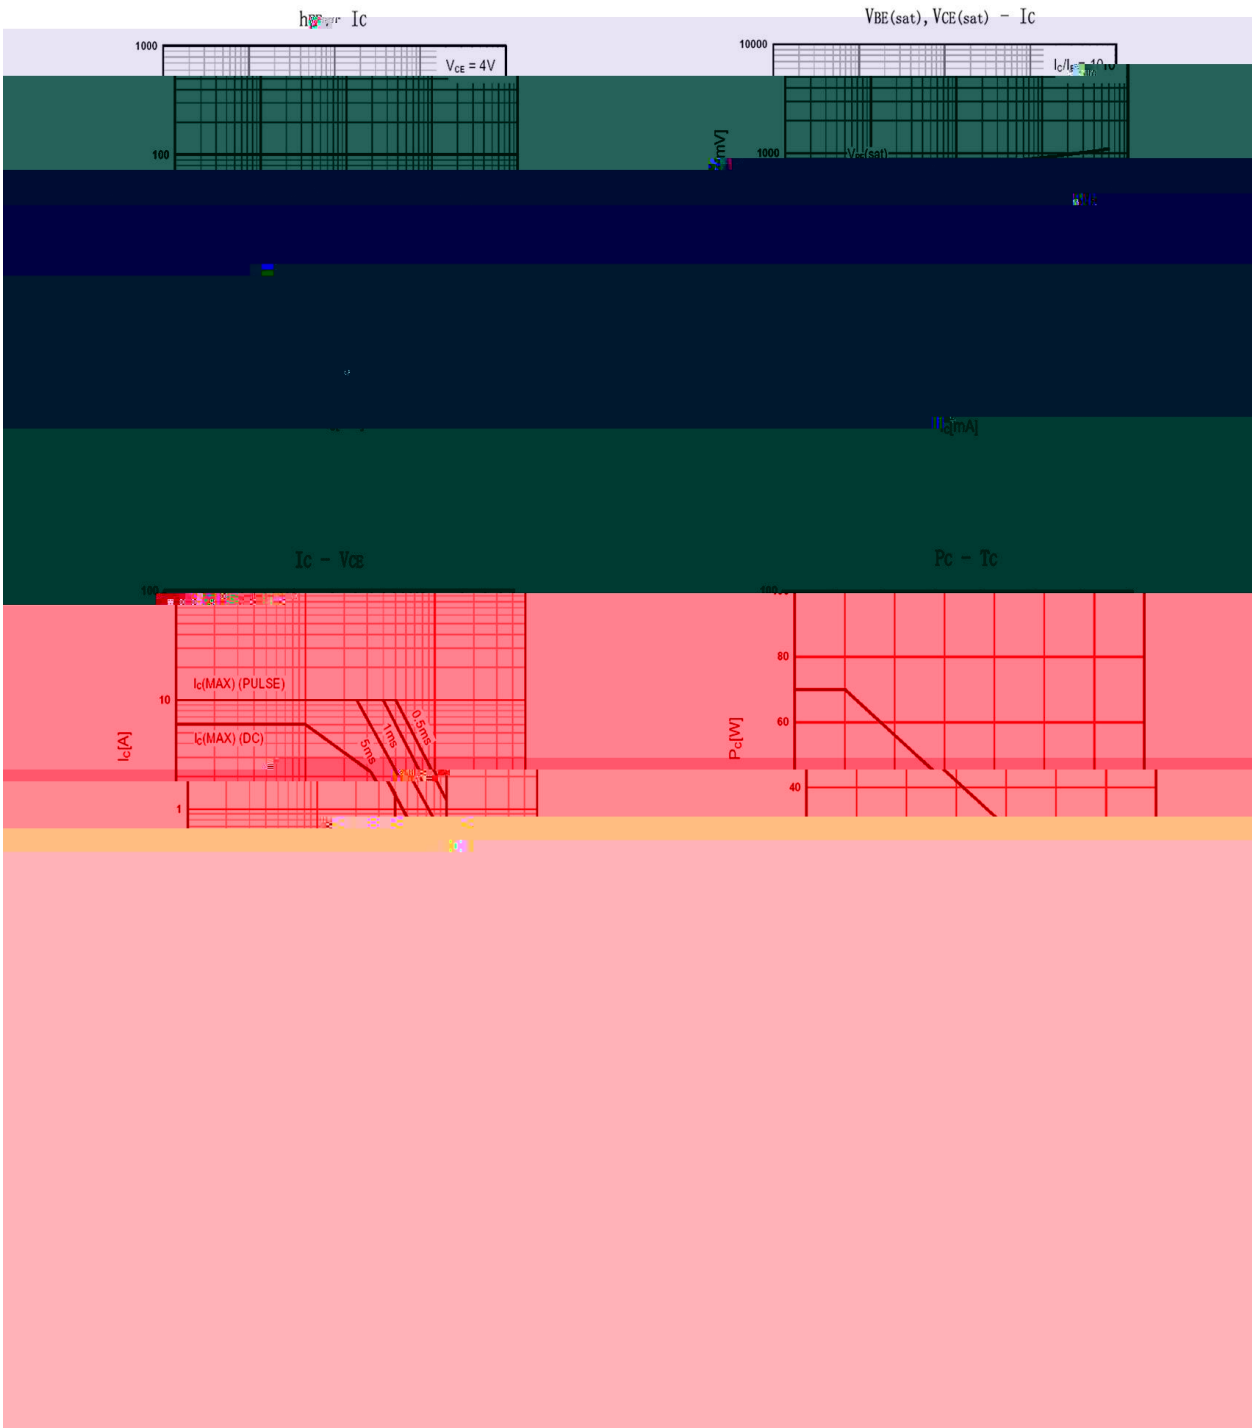


		単位: mm					
		Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max	Symbol	Min
A	4.30	4.70	E _L	9.00	9.40		
B	1.00	1.40	e ₁	2.34	2.74		
b	0.70	0.90	e ₂	4.88	5.28		
b ₁	1.15	1.35	L ₁	15.00	16.00		
b ₂	0.40	0.60	L ₂	2.24	2.64		
C	1.20	1.40	L ₃	1.20	1.60		
D	9.80	10.20					

TJ-263

/ Marking Instructions

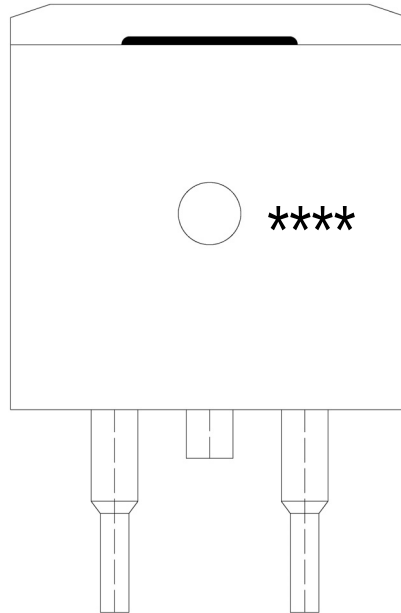

() / Temperature Profile for Dip Soldering(Pb-Free)

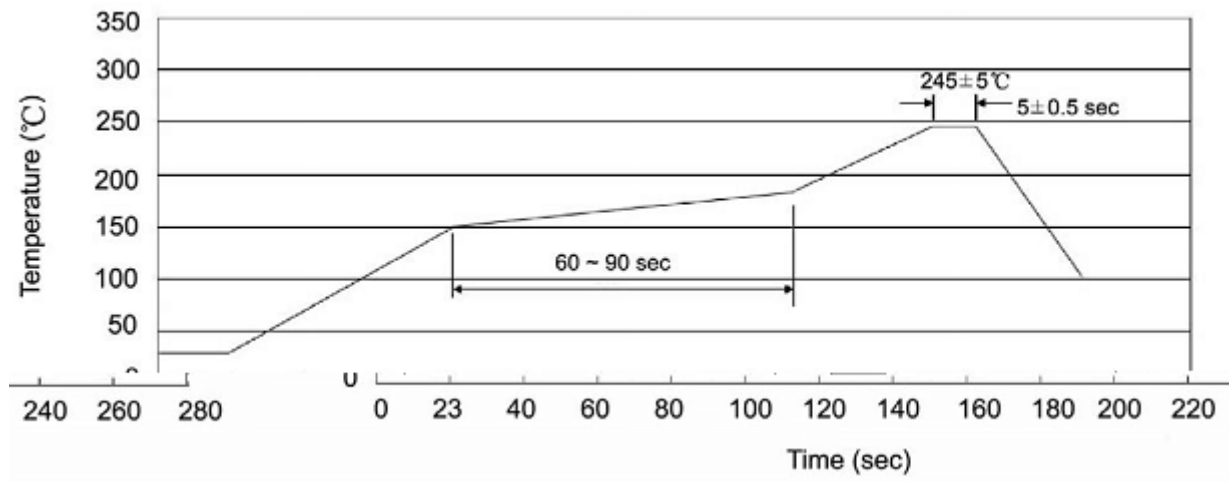

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-263	800	1	800	5	4,000	13 ×24	360×360×50	385×257×392

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-263	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

/ Notices