




100V~1000V0.8A



| PIN | DESCRIPTION          |
|-----|----------------------|
| 1   | Input Pin ( ~ )      |
| 2   | Input Pin ( ~ )      |
| 3   | Output Anode ( + )   |
| 4   | Output Cathode ( - ) |

The recommended mounting pad size




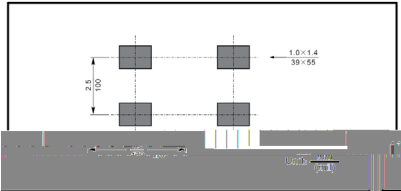




|  |          |  |  |  |  |  |  |  |
|--|----------|--|--|--|--|--|--|--|
|  |          |  |  |  |  |  |  |  |
|  |          |  |  |  |  |  |  |  |
|  |          |  |  |  |  |  |  |  |
|  |          |  |  |  |  |  |  |  |
|  |          |  |  |  |  |  |  |  |
|  |          |  |  |  |  |  |  |  |
|  |          |  |  |  |  |  |  |  |
|  |          |  |  |  |  |  |  |  |
|  |          |  |  |  |  |  |  |  |
|  | $\theta$ |  |  |  |  |  |  |  |
|  |          |  |  |  |  |  |  |  |




|  |  |  |  |       |
|--|--|--|--|-------|
|  |  |  |  |       |
|  |  |  |  |       |
|  |  |  |  |       |
|  |  |  |  | $\mu$ |
|  |  |  |  |       |

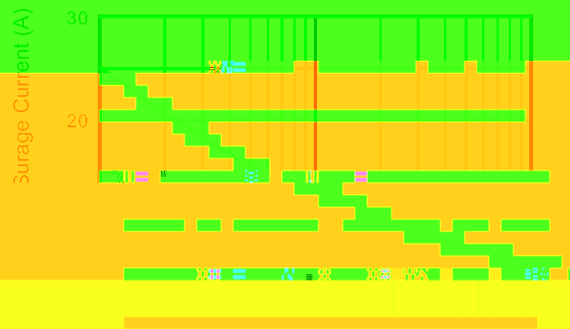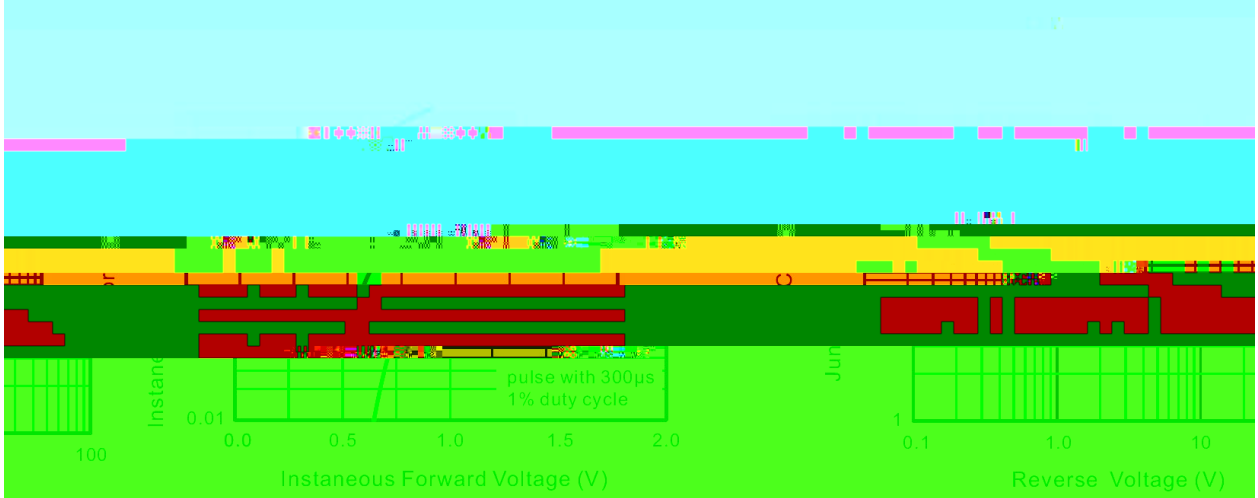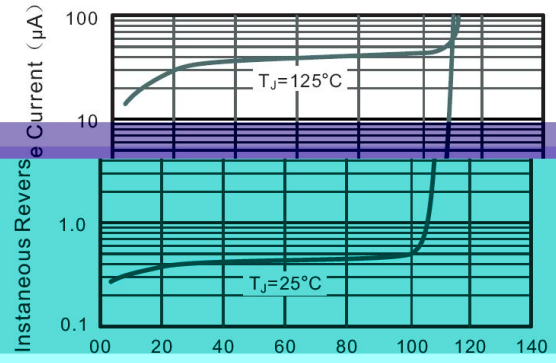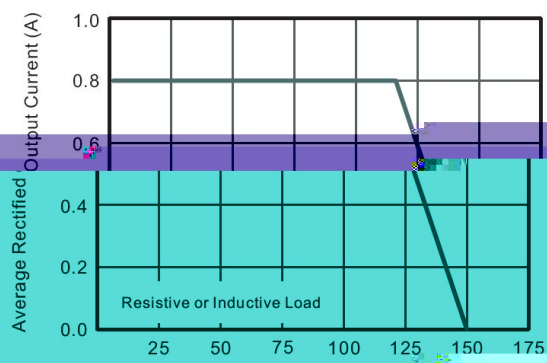

UMR



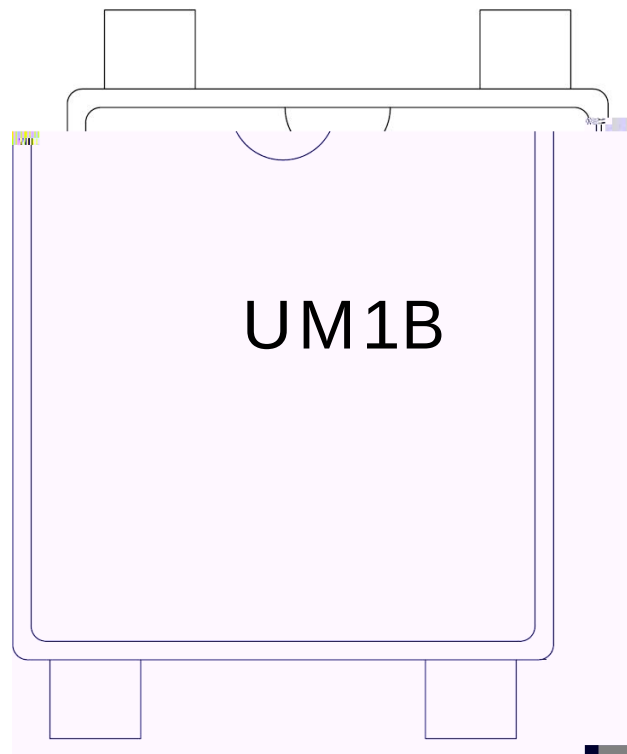

UM1B

1 \*


3 \*

UM1B

\*

\*

Temperature Profile for IR Reflow Soldering(Pb-Free)

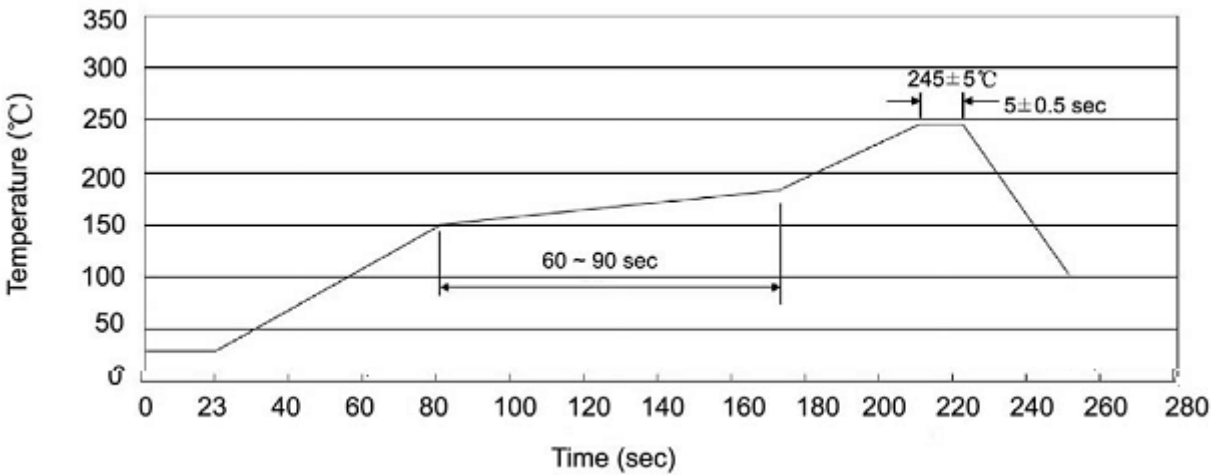

± ± ± ±

± ±

|            |                 |                 |                       |                 |      |           |           |
|------------|-----------------|-----------------|-----------------------|-----------------|------|-----------|-----------|
|            |                 |                 |                       |                 |      |           |           |
| Units/Reel | Reels/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Reel | Inner Box | Outer Box |
| /          | /               | /               | /                     | /               |      |           |           |