




[illegible]



, , 0 ,

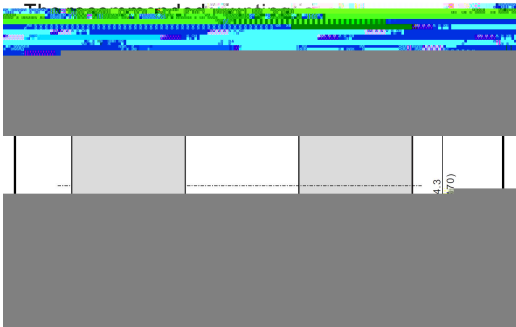



参数	参数符号	数值							单位
℃	()								
									℃
									℃



参数	参数符号	测试条件	数值						单位	
		℃								
		℃								





Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

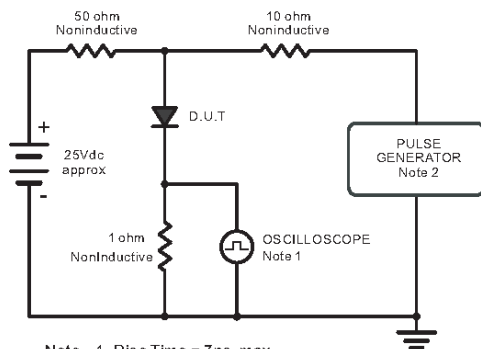

Note: 1. Rise Time = 7 ns, max.
Input Impedance = 1 megohm, 22pF.
2. Rise Time = 10 ns, max.
Source Impedance = 50 ohms.

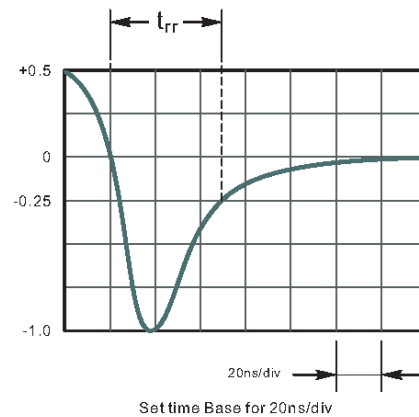


Fig.2 Maximum Average Forward Current Rating

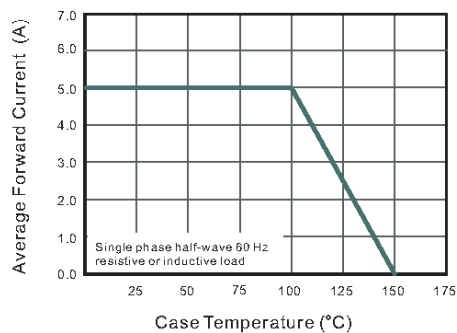


Fig.3 Typical Reverse Characteristics

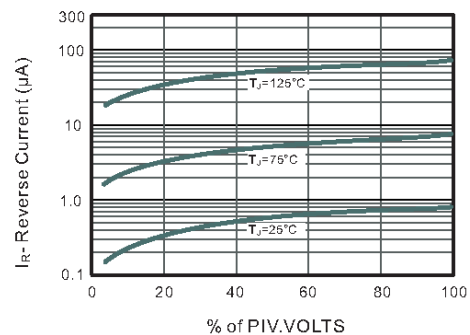


Fig.4 Typical Forward Characteristics



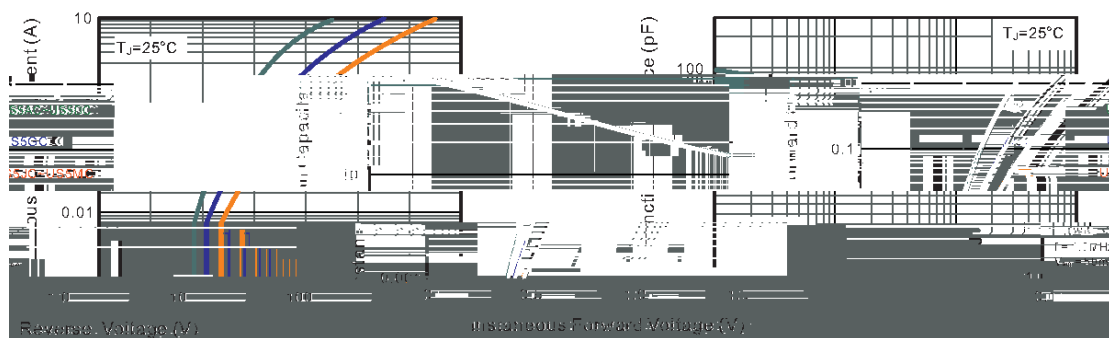


Fig.5 Typical Junction Capacitance

Fig.6 Maximum Non-Repetitive Peak Forward Surge Current


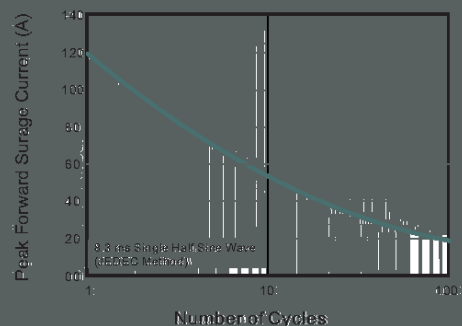


max	2.62	7.0	6.2	0.0	0.24
-----	------	-----	-----	-----	------



Marking

Type number		Marking code	
U2en1	I	U2en1	I
U2en2	I	U2en2	I
U2en3	I	U2en3	I
U2en4	I	U2en4	I
U2en5	I	U2en5	I
U2en6	I	U2en6	I
U2en7	I	U2en7	I

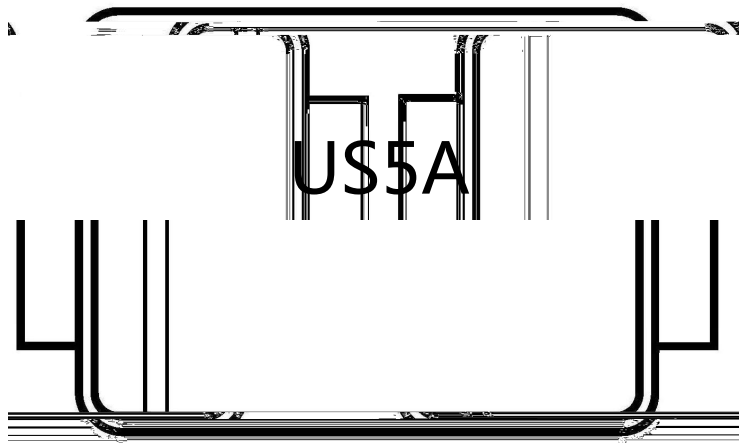

US5A


1 *

3 *


US5A

*

*



Temperature Profile for IR Reflow Soldering(Pb-Free)

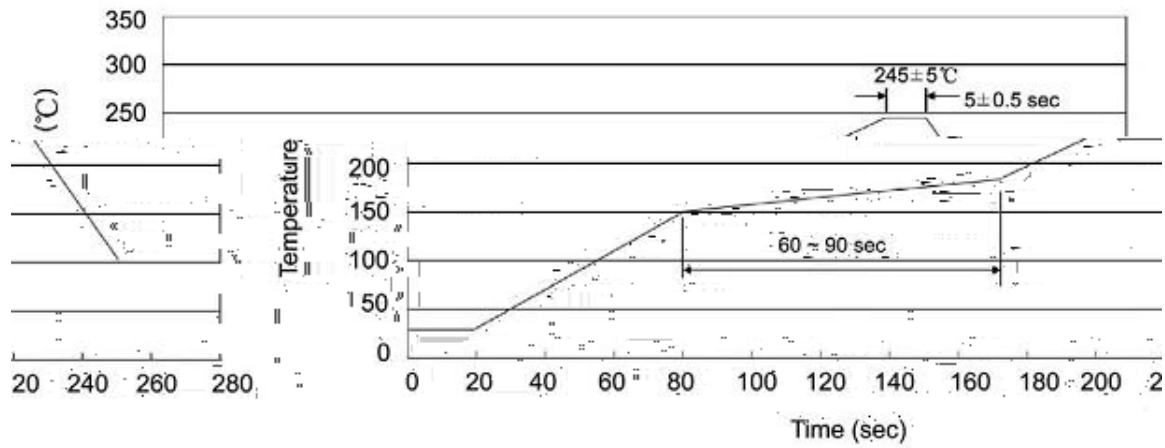

± °C ± °C ± °C ± °C

± °C ± °C ± °C ± °C

	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
						"		